

Axis-S_ Recessed INSTALLATION MANUAL


Step 1: Cut out of Diameter 84mm in the ceiling as shown in the below figure.

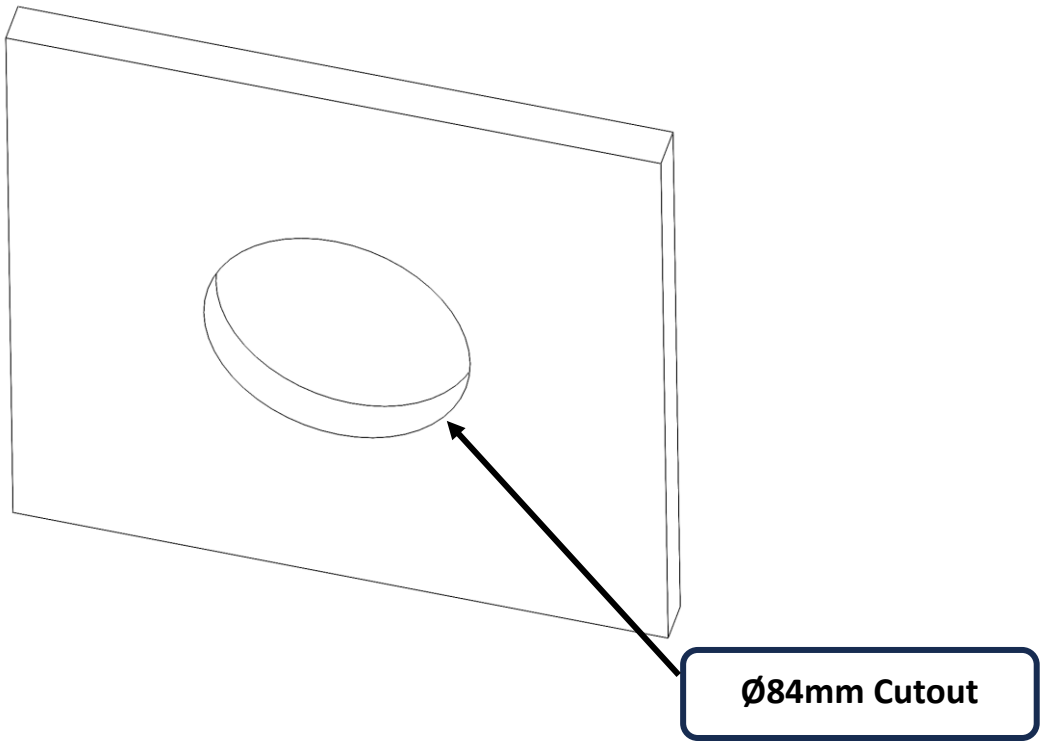


Step 2: Position and lock the frame by applying pressure to the toggle spring.

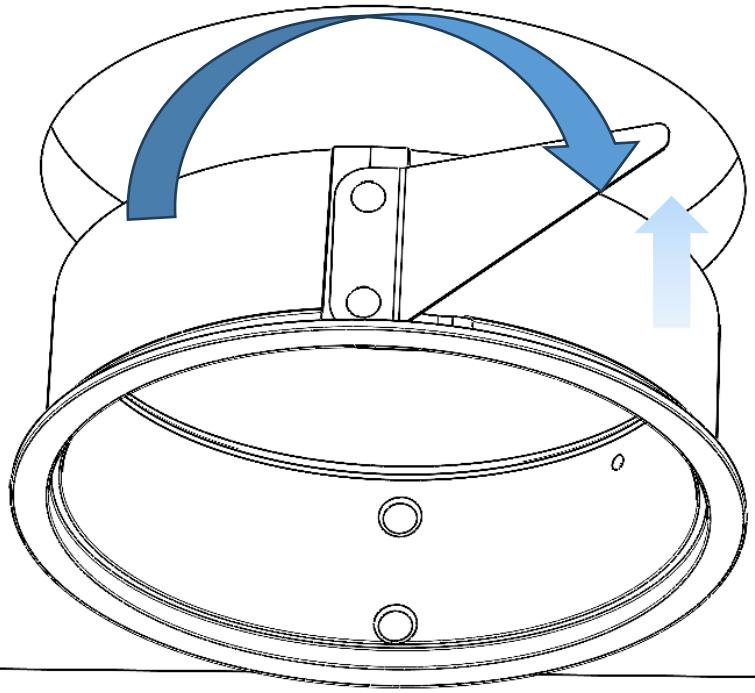


Step 3: Connect the fixture to the driver and ball plunger lock it to the frame as show in figure.

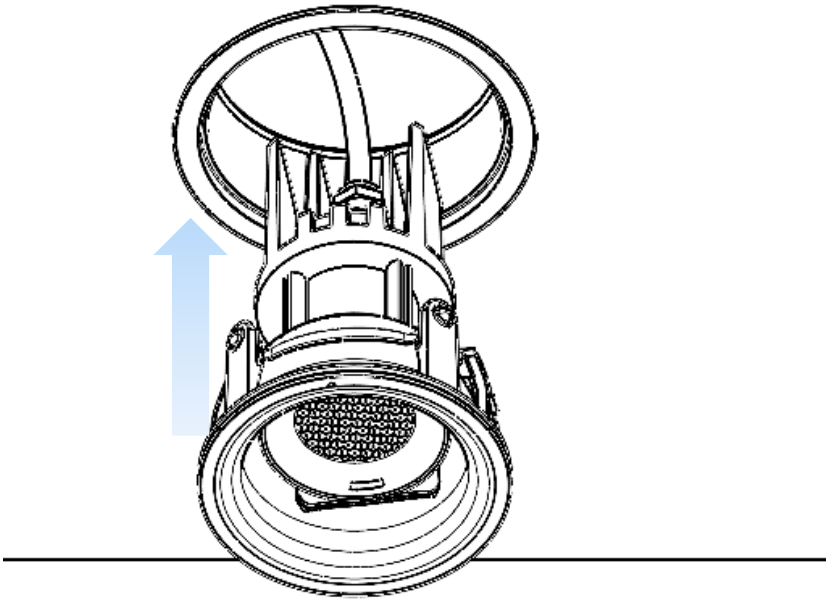



Step 4: For Adjusting the fixture, first remove the cap from as shown in figure.

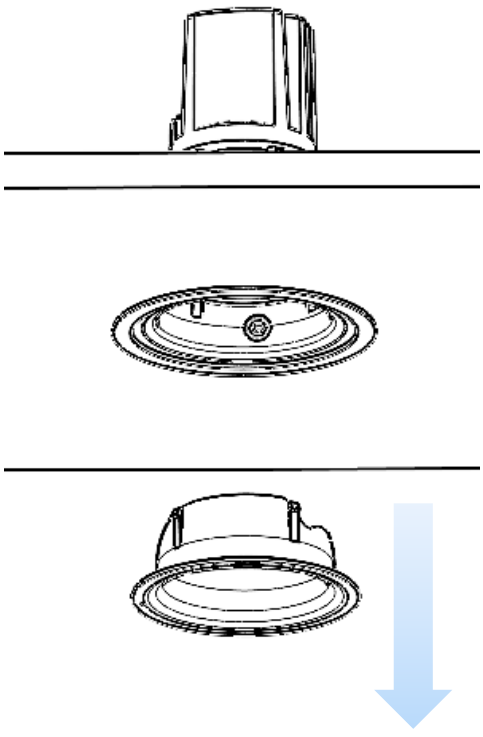


Step 5: Just insert the Allen key(M5) in given slot and rotate as per required tilt angle shown in figure.

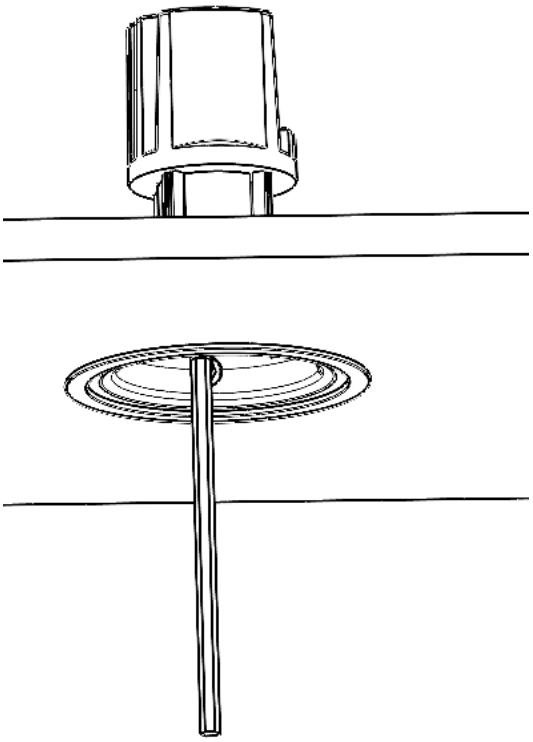


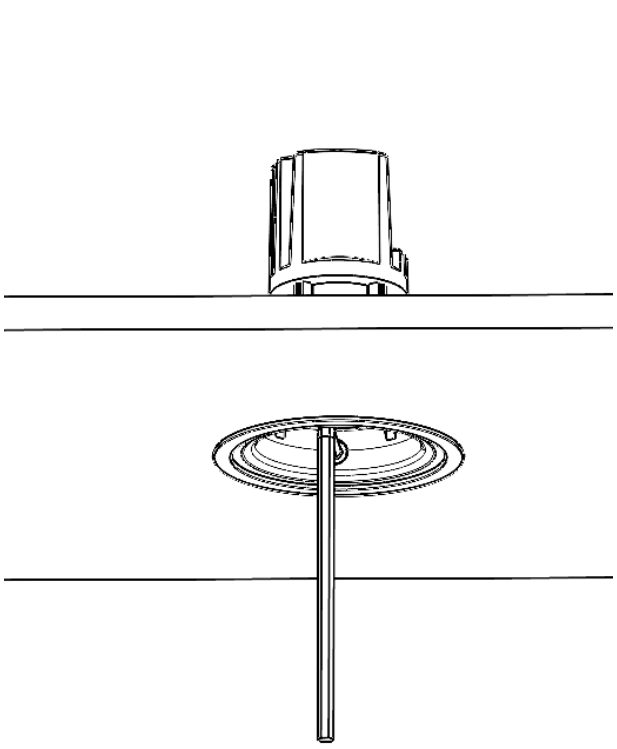


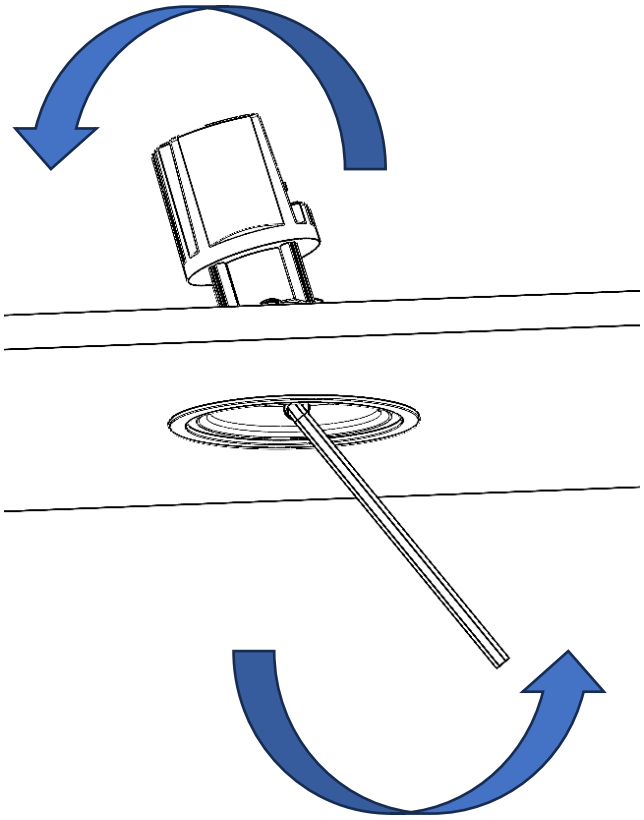


Step 6: After tilted fixture we can rotate 358Deg as per requirement shown in figure.

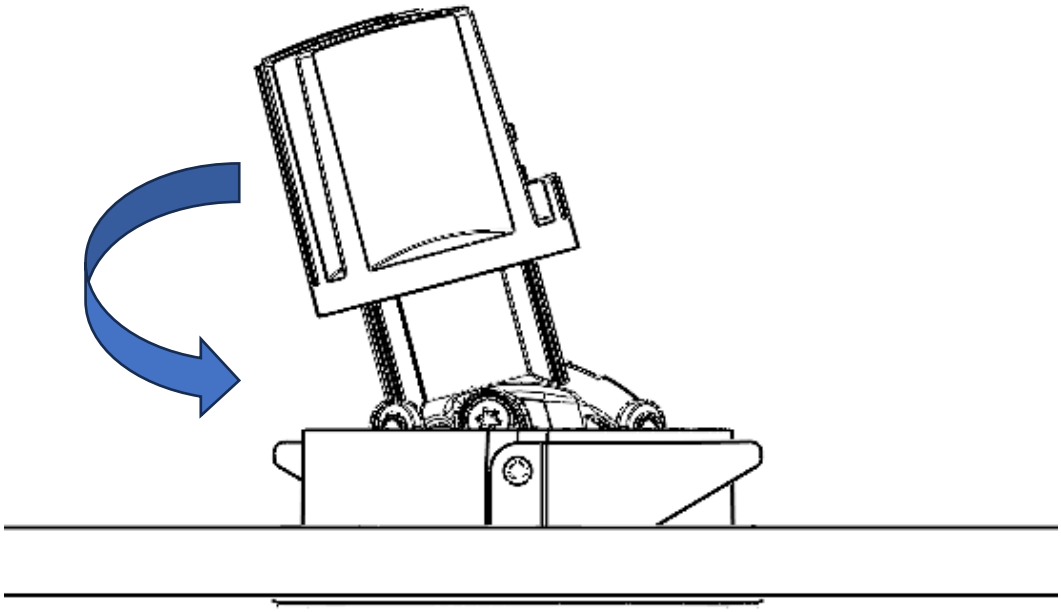

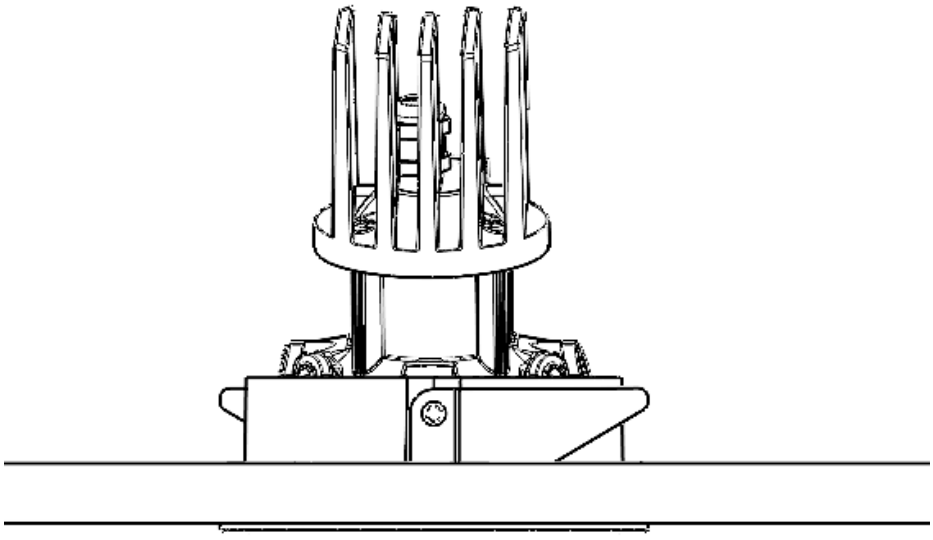

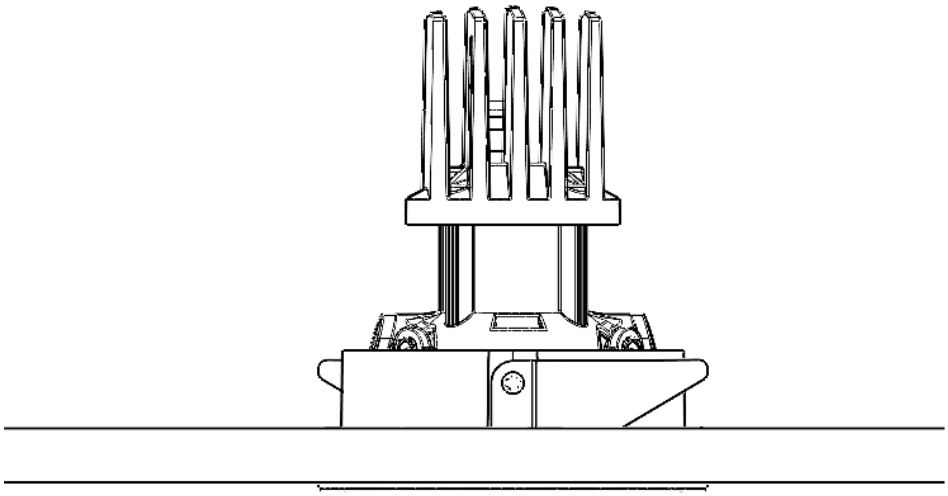

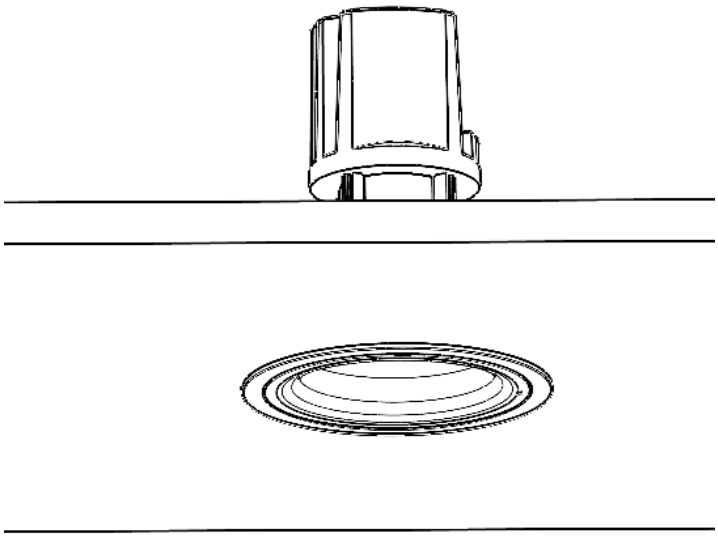

Installation completed. The lights can be turned on!