

Tumblerr Wall Mounting Installation Manual (Integrated Driver)


Step 1 : Create hole Ø20mm with 20mm depth in the wall as shown in below figure.

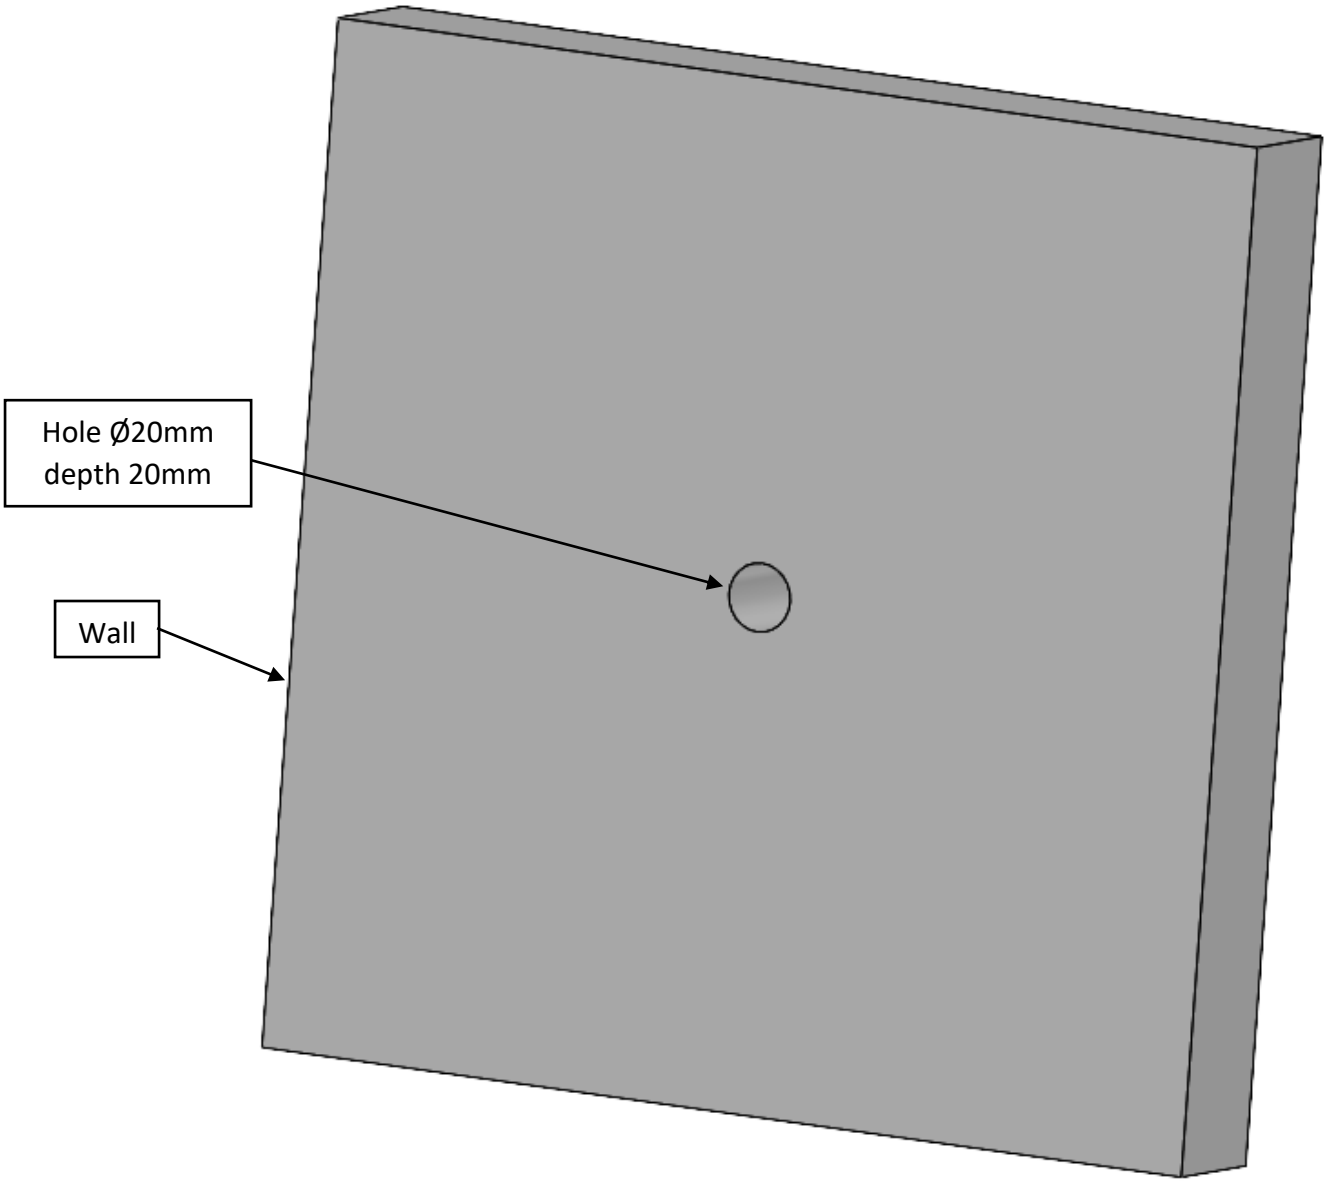


Step 2 : Create 3 hole for wall mounting screw by using base bottom in the wall as shown in below figure.

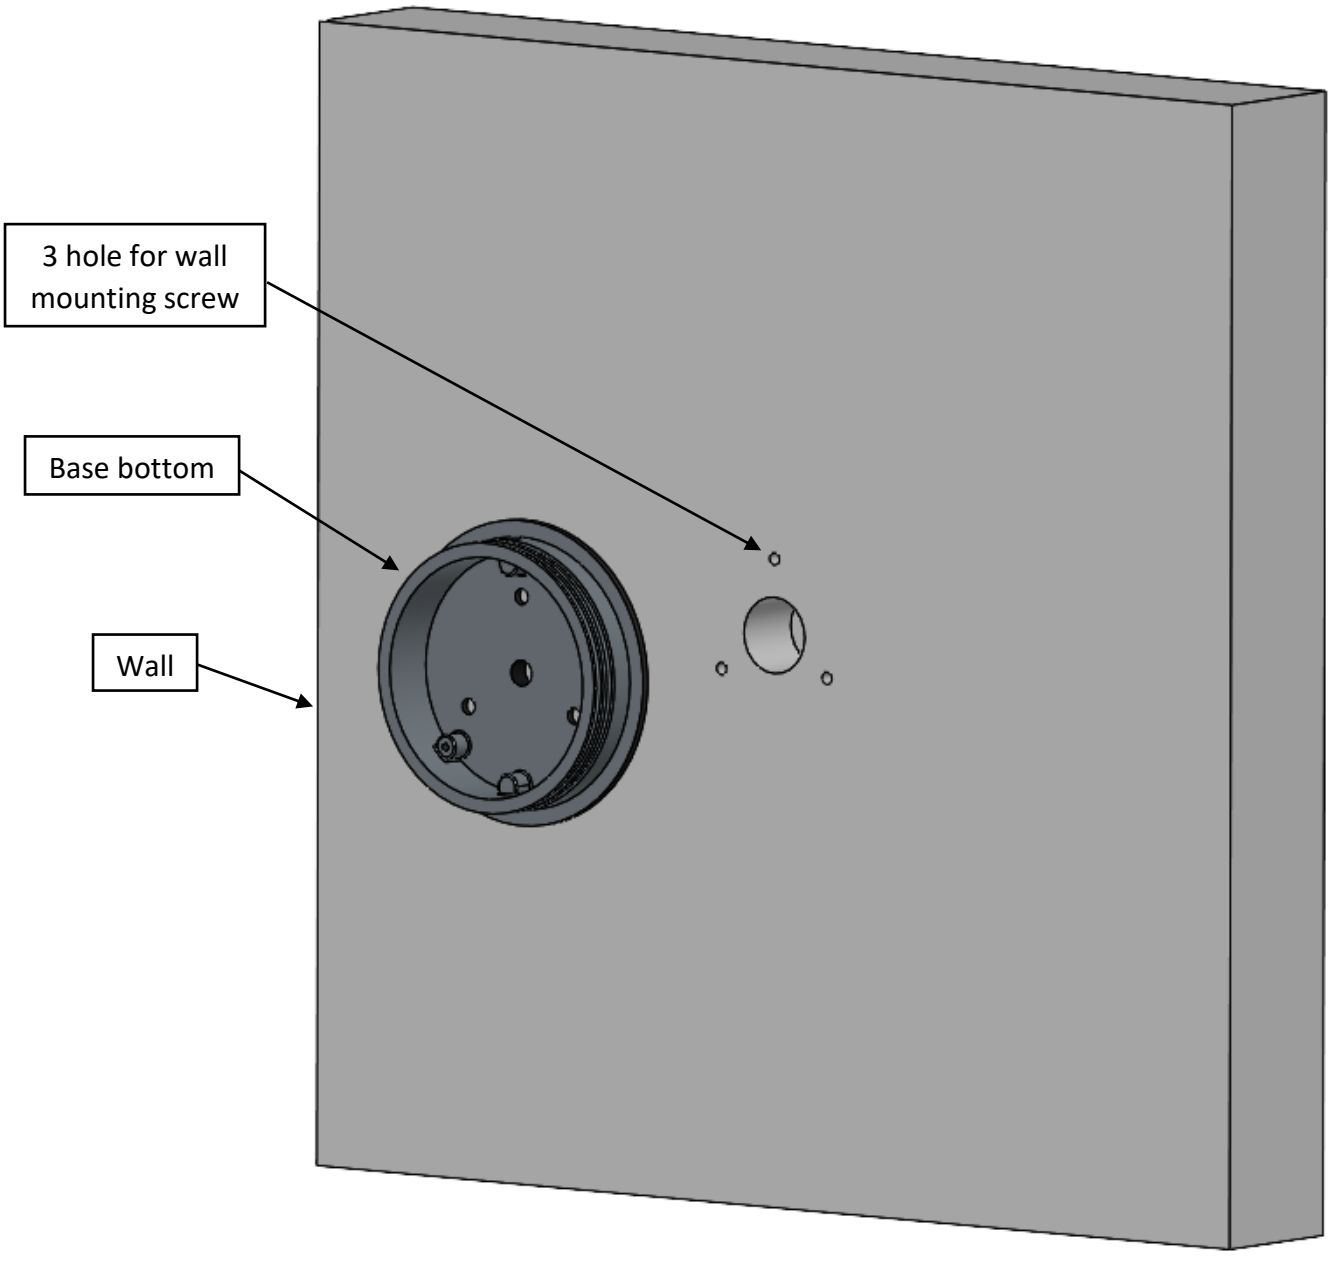


Step 3: Base bottom fix with wall by using 3 wall mounting screw with o-ring as shown in below figure.

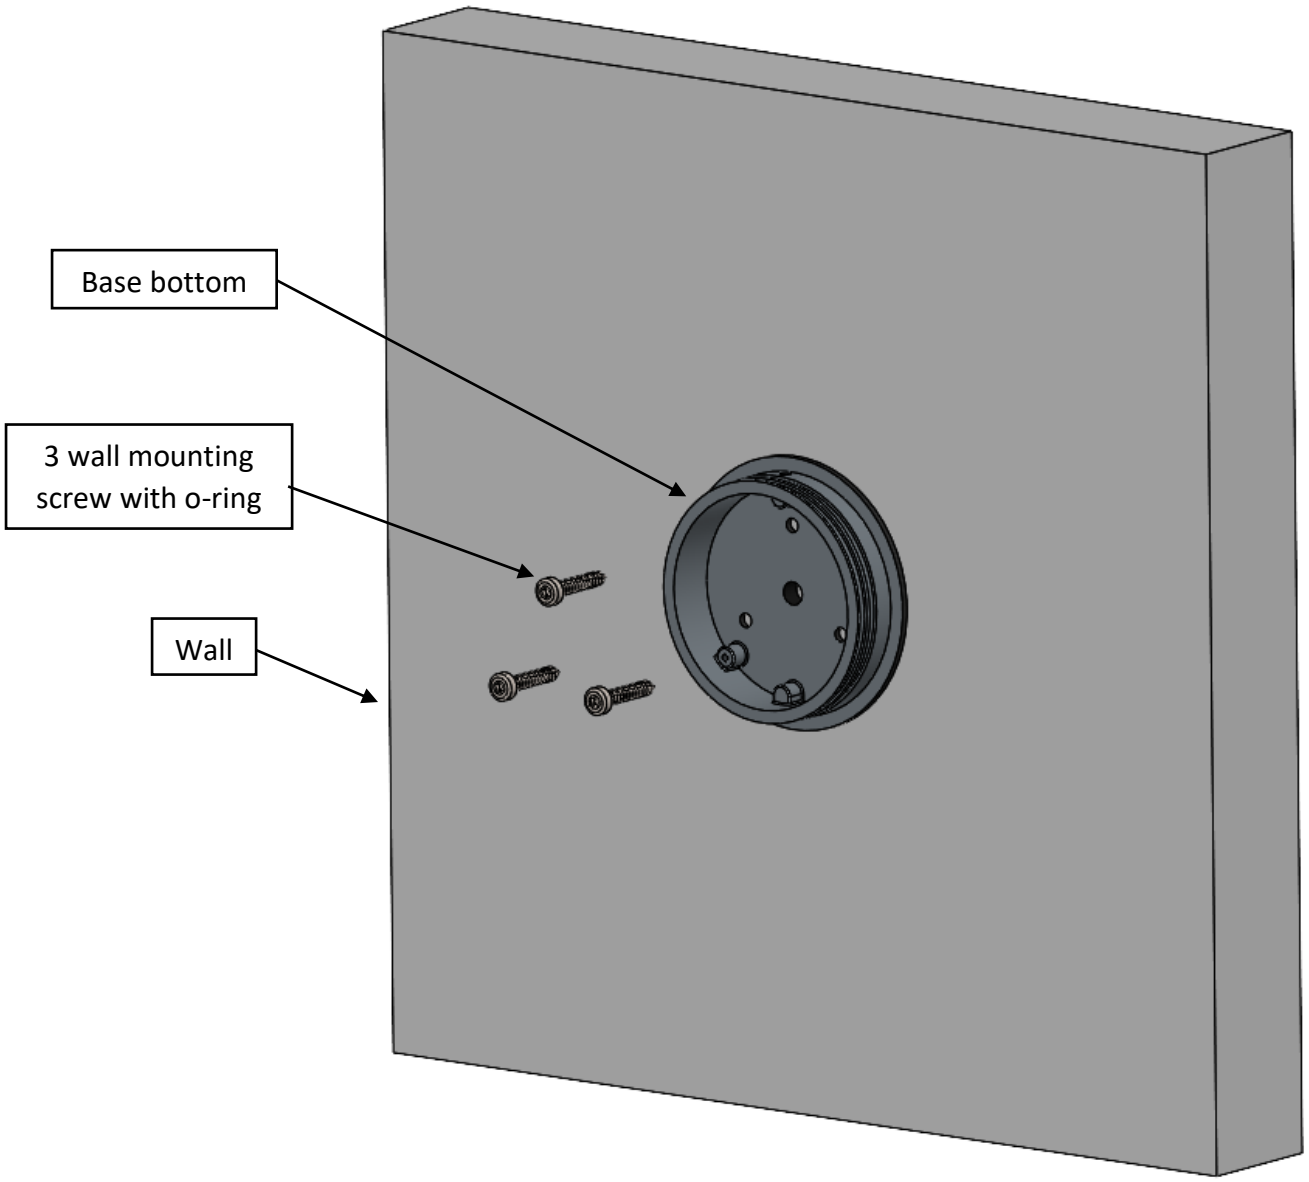


Step 4: Connect main supply wire to driver input. After that base plate assemble with base bottom by using 2 mounting screw as shown in below figure.

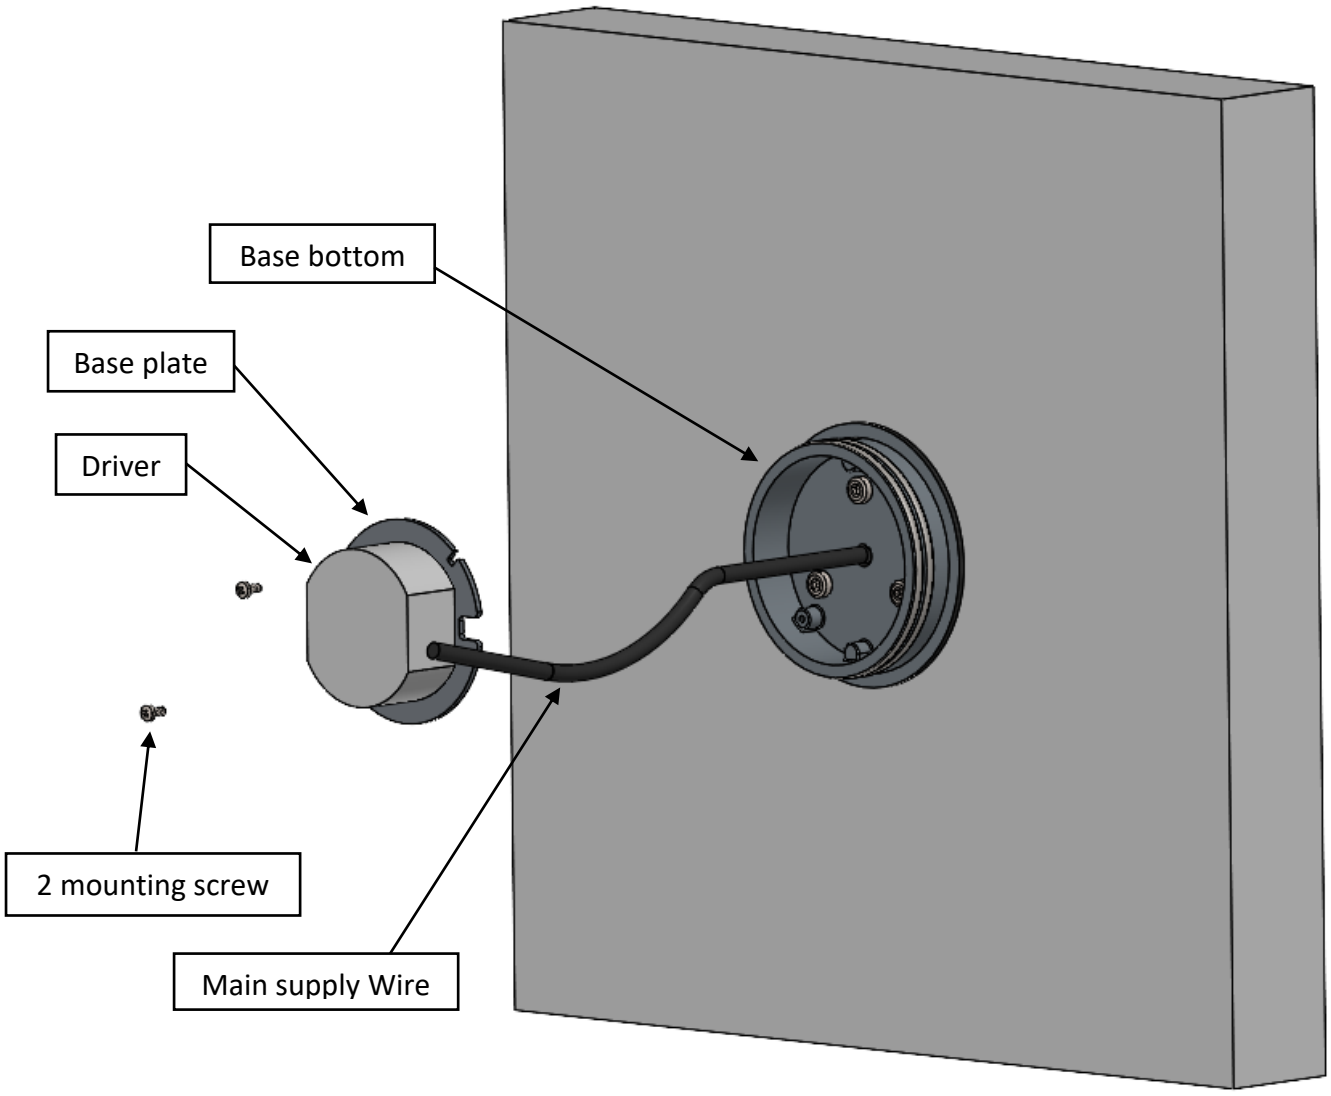


Step 5: Connect driver output to LED wire. After that Fixture assemble with base bottom by using 2 grub screw as shown in below figure.

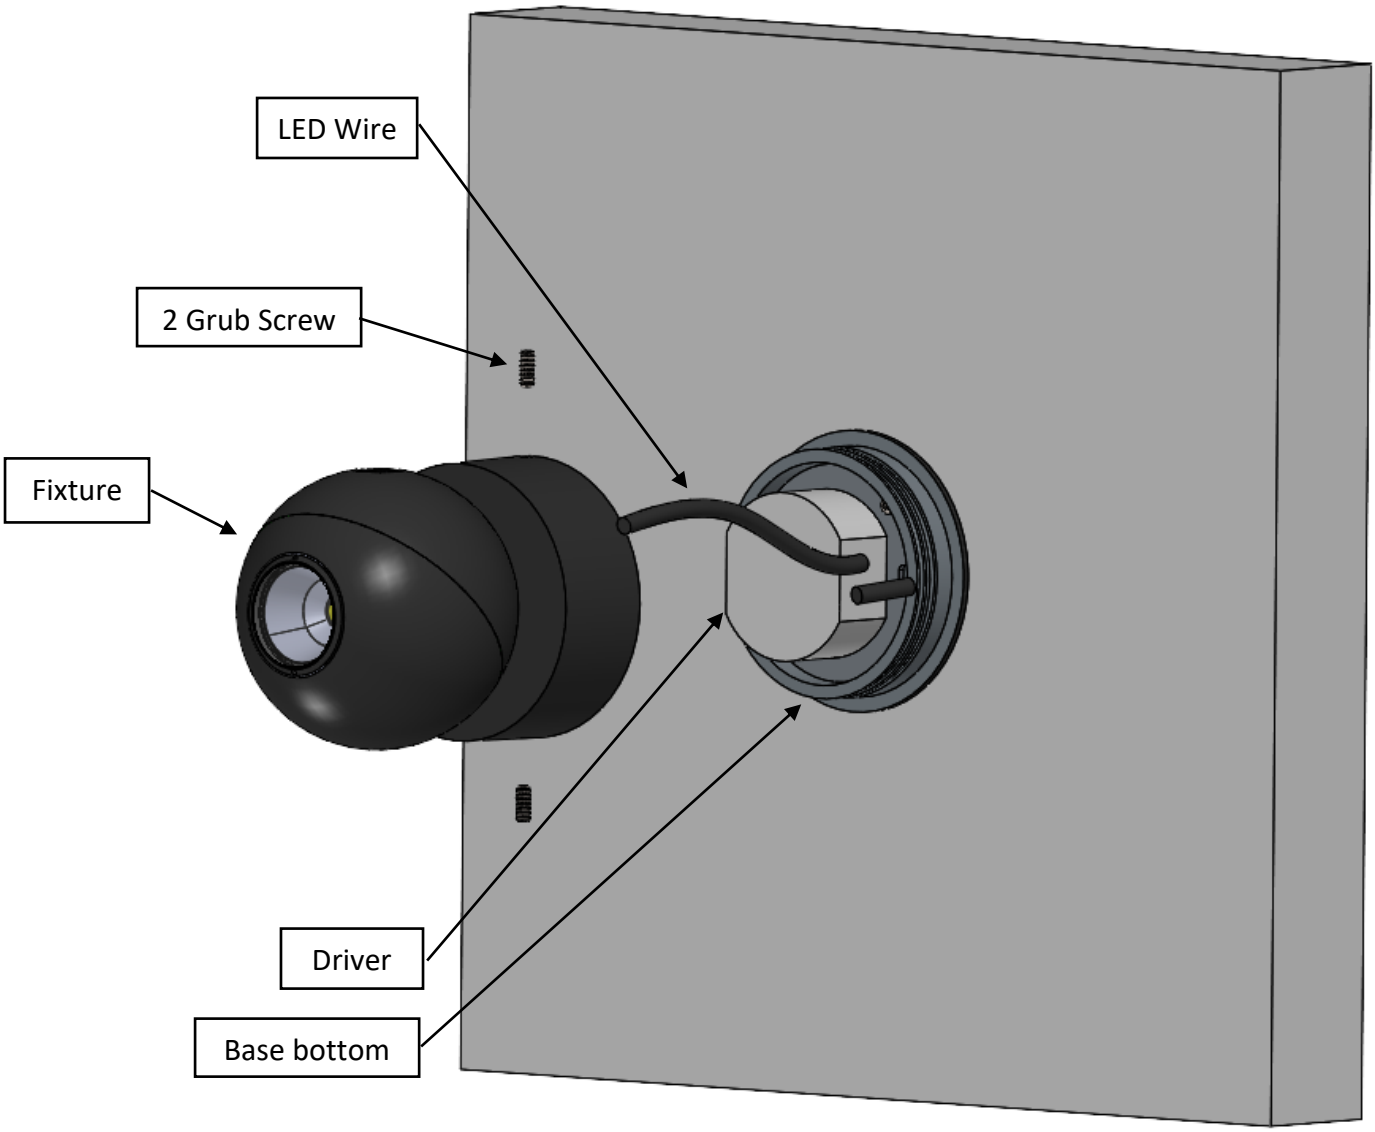

Step 6: Rotate fixture by holding bottom part as per requirement, set your light spot.

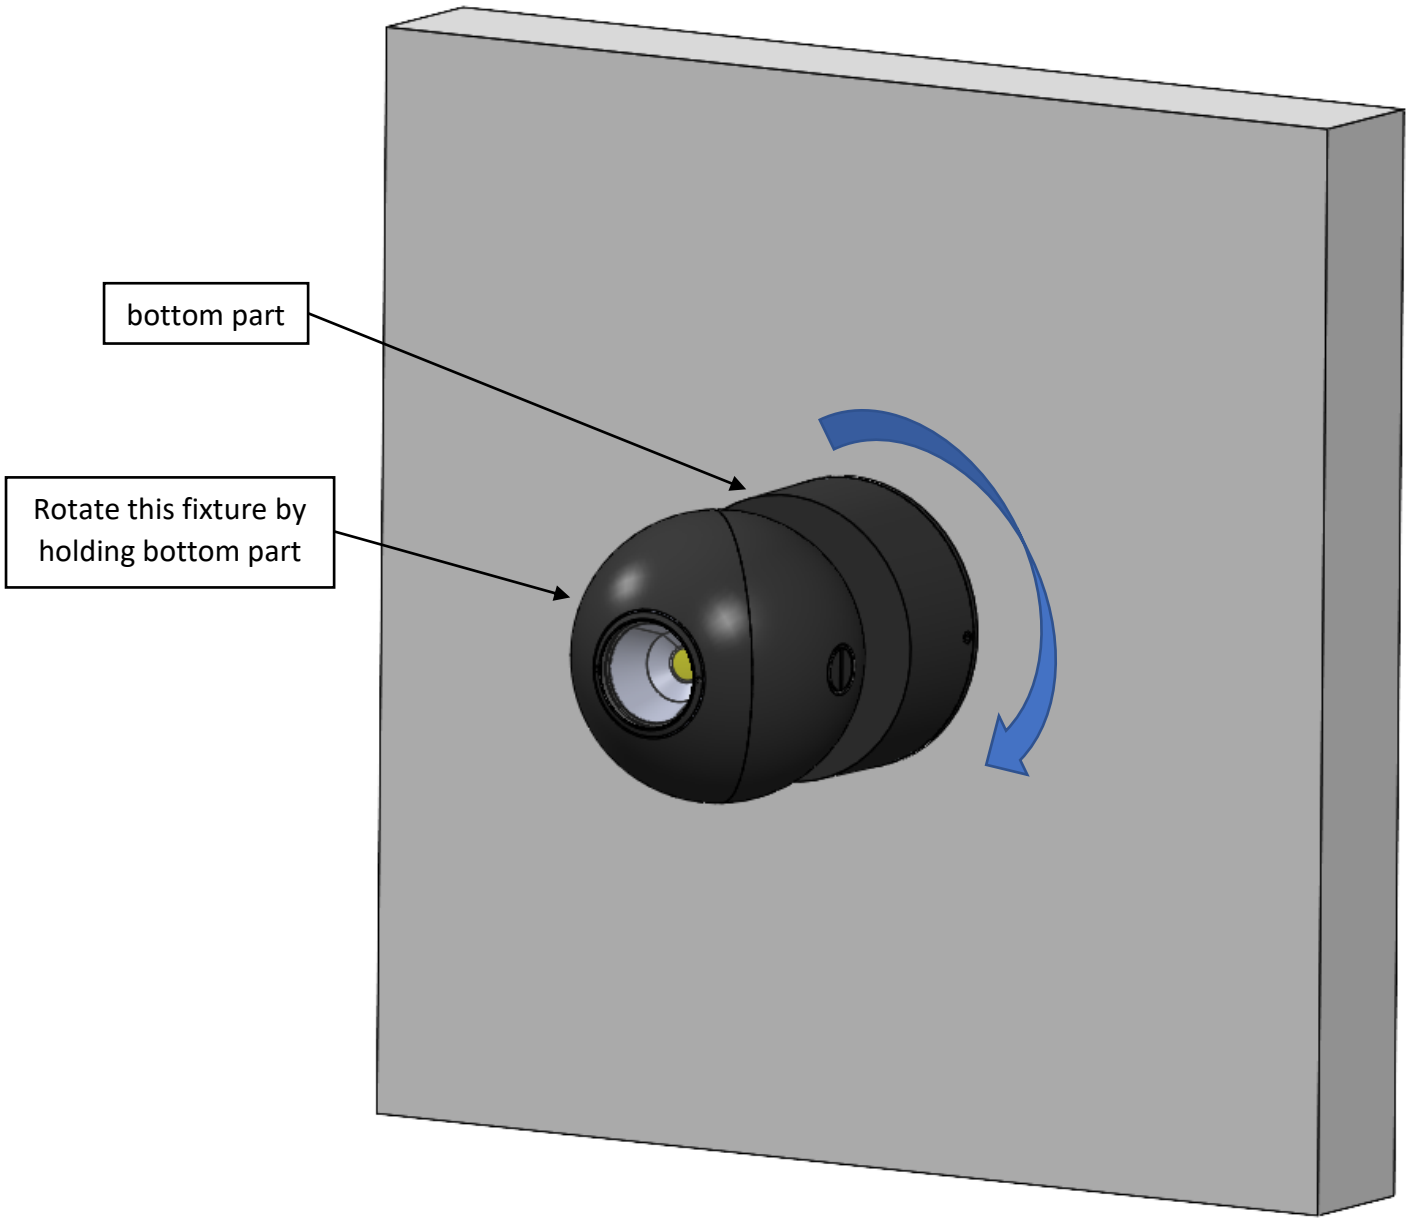

Step 7: Rotate top sphere by holding bottom sphere as per requirement, set your light spot.

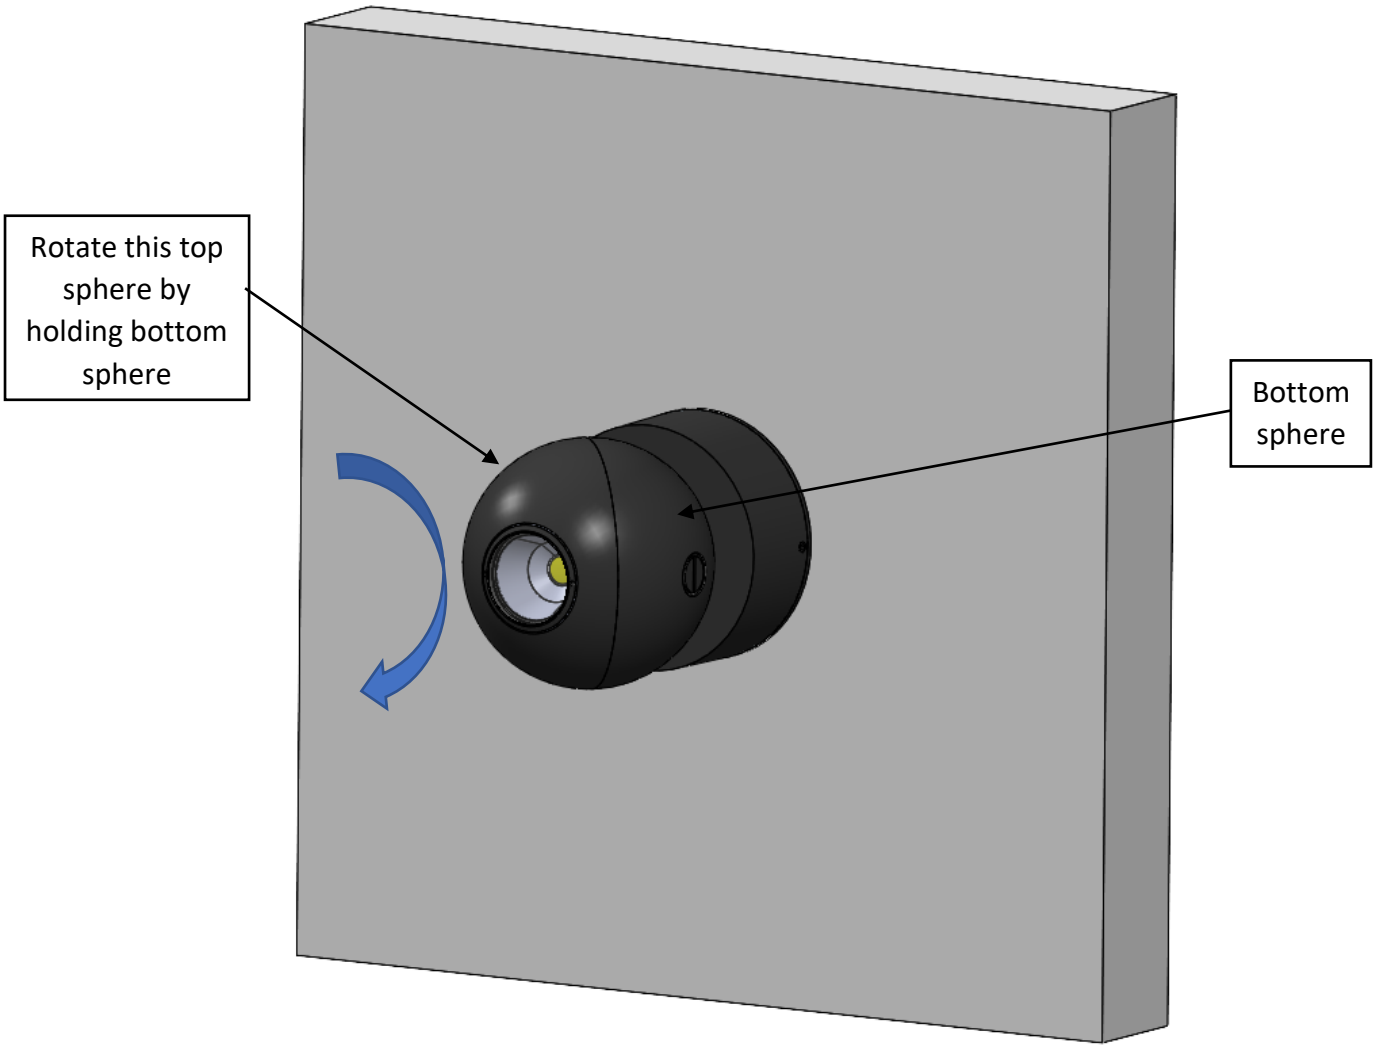

Installation is complete. Lights can be Turned On!