

Nano One Flat Fixed Recessed Installation Manual

Step 1: Make cutout in ceiling with hole saw cutter. The ceiling thickness should be 10 mm.

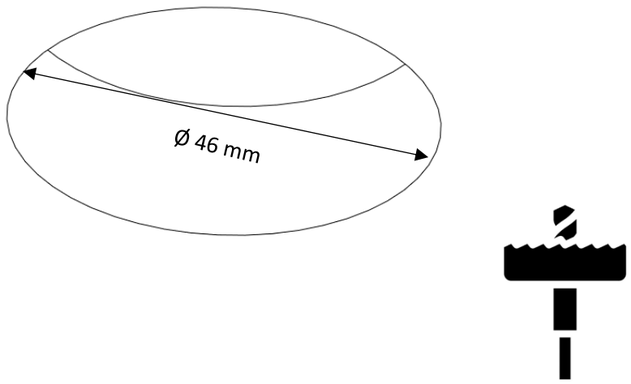


Step 2: Take out main supply cable through cutout.

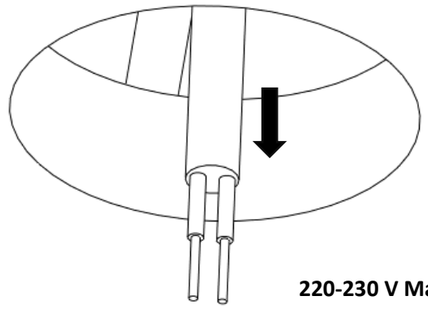


220-230 V Main Cable

Step 3: Connect the main supply cable to the driver.

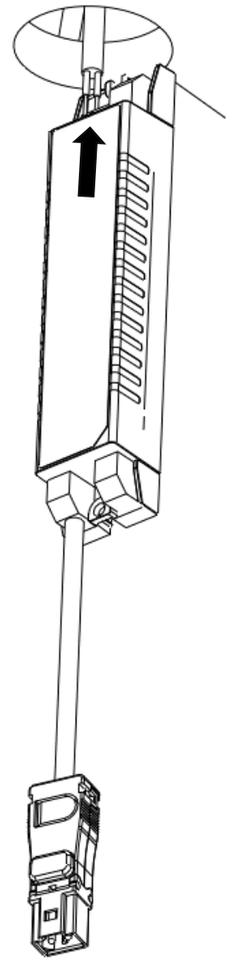


Step 4: Connect the fixture to the driver with the help of a quick connector.

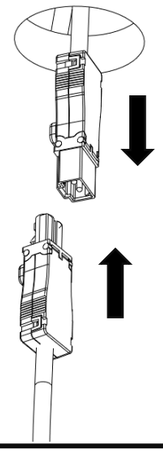


Connector


Step 5: Press the toggle and insert the fixture into the cutout.

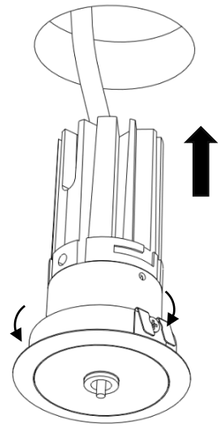

Step 6: Installation completed.

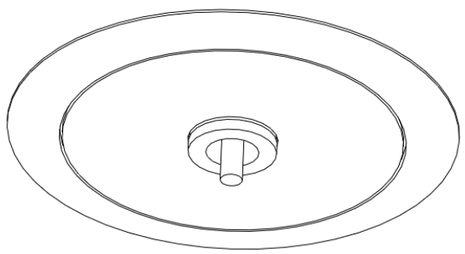

Step 7: Before lighting on, remove the security plug. Hold the fixture and remove the security plug.

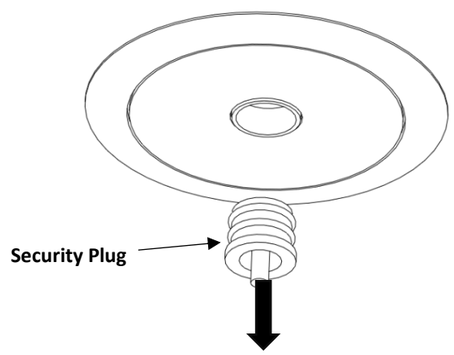




Date: 05.12.2025/ Rev:00

Maintenance Instruction

Step 8: Insert the security plug into cap.

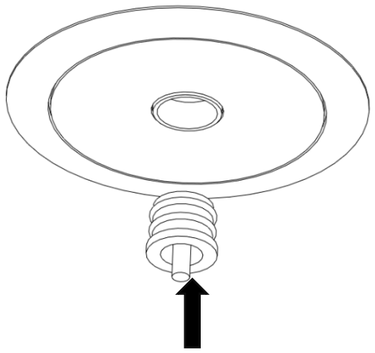

Step 9: Then pull the engine from the ring. If maintenance is done, then insert the engine into the ring.

