

Illios Grazer Recessed Installation Manual

Step 1: Make a cut out for fixture in ceiling as shown in below figure, then select the cut out dimension **(L) mm X (W) mm** from below table.

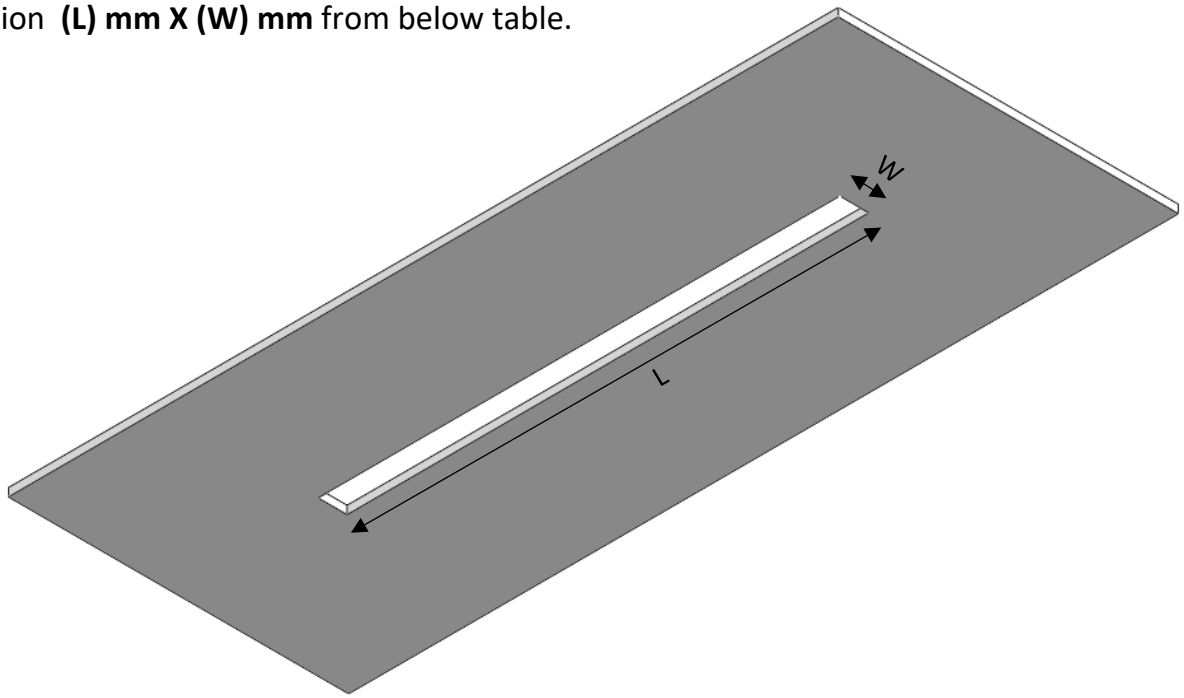


Sr. No	Fixture Length	Cutout Length(L) x Width (W) (mm)	No. of springs for Fixture	Distance between Two Springs (mm)
1	135 mm	129 mm x 28 mm	2 Nos	95 mm
2	260 mm	254 mm x 28 mm	2 Nos	190 mm
3	510 mm	504 mm x 28 mm	2 Nos	375 mm
4	1010 mm	1004 mm x 28mm	2 Nos	750 mm
5	2010mm	2004 mm x 28 mm	4 Nos	500 mm


Step 2: Insert the driver through the cut-out and connect the fixture (Cable 1) with driver. Cable 2 is providing for connect multi Illios Grazer Recessed fixtures one by one.

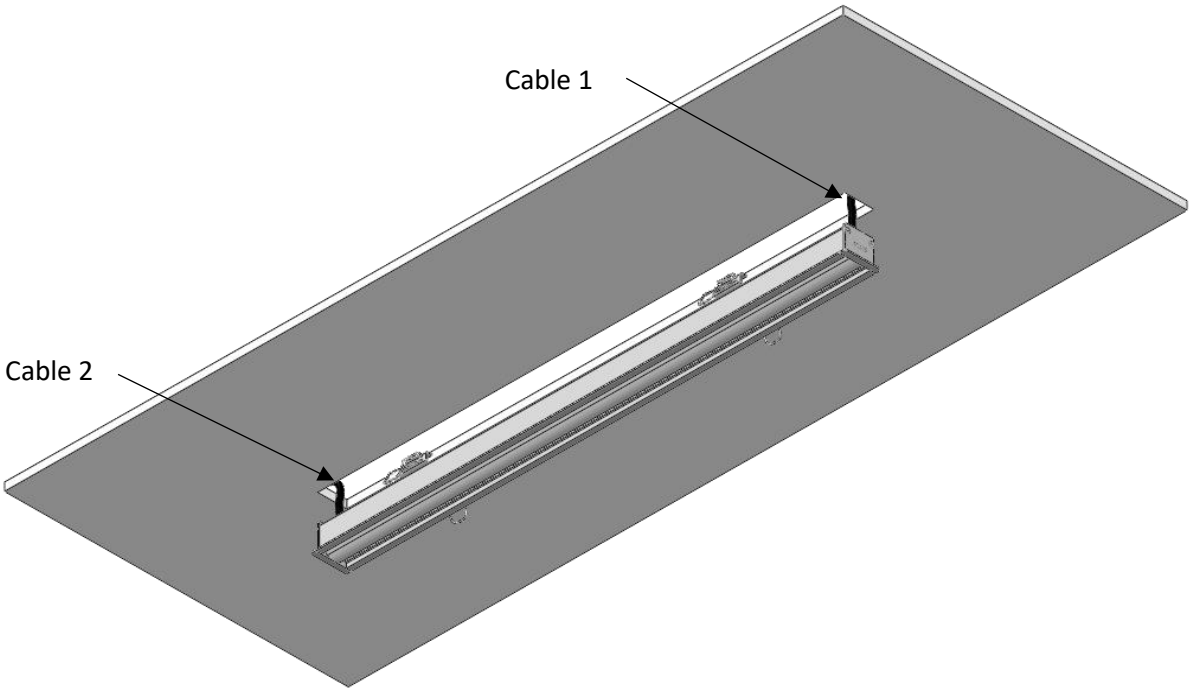


Step 3: Press the all springs upward direction, then insert the fixture into the cut-out.

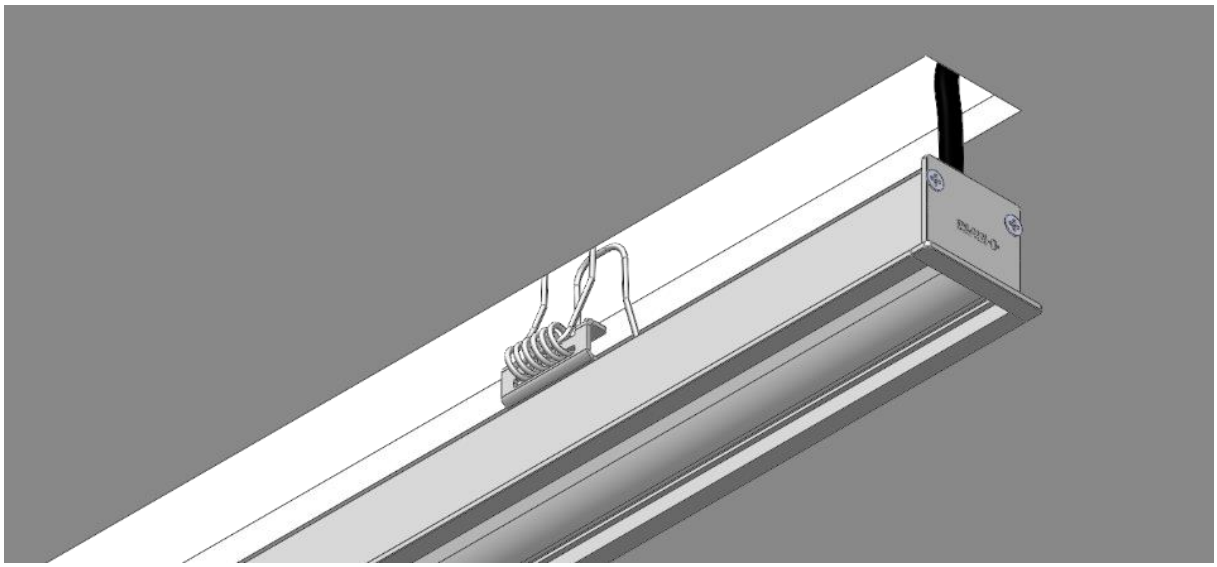


Front View

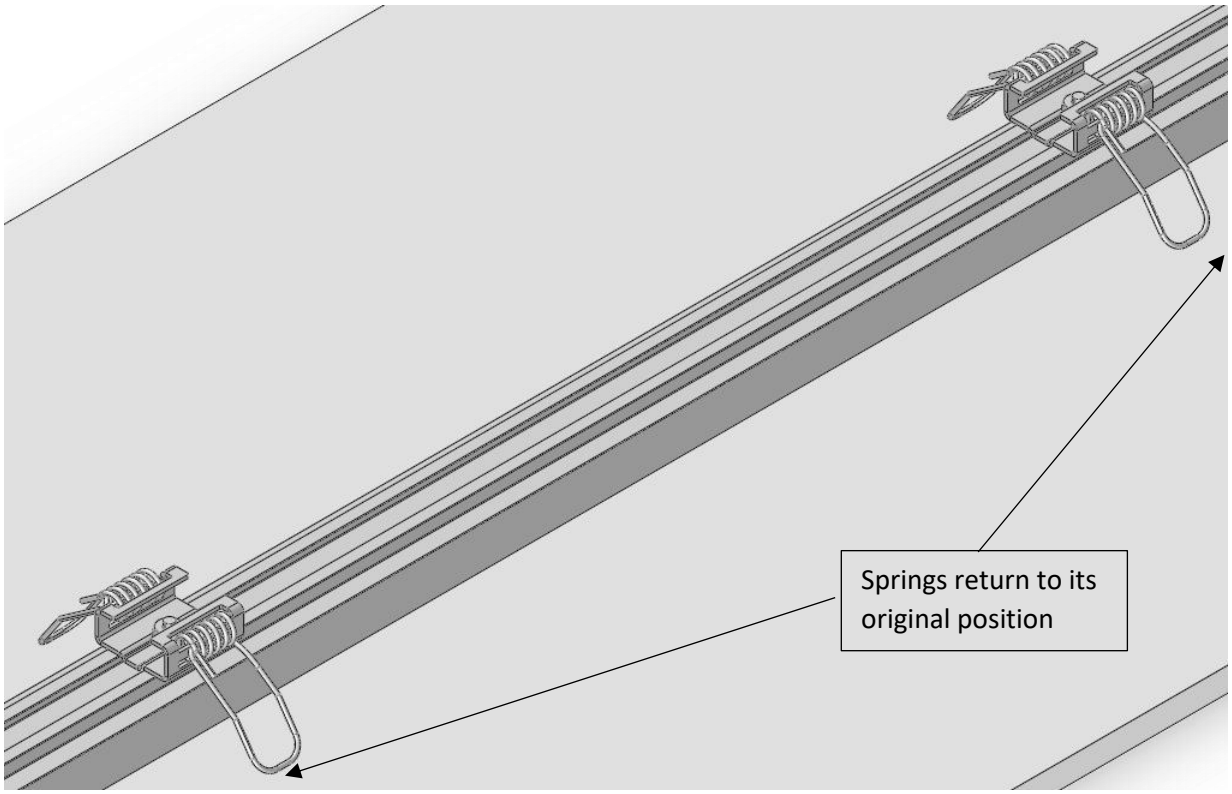

Rear View

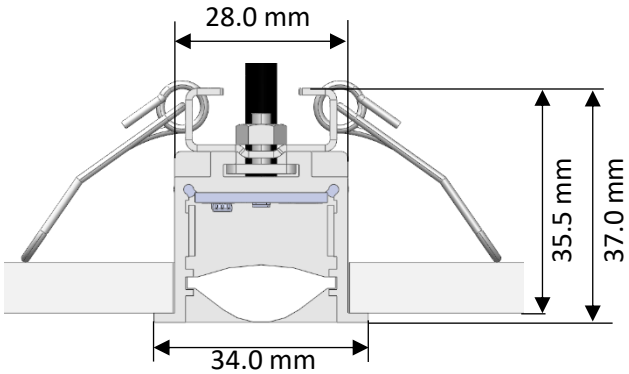


Cross-Section View

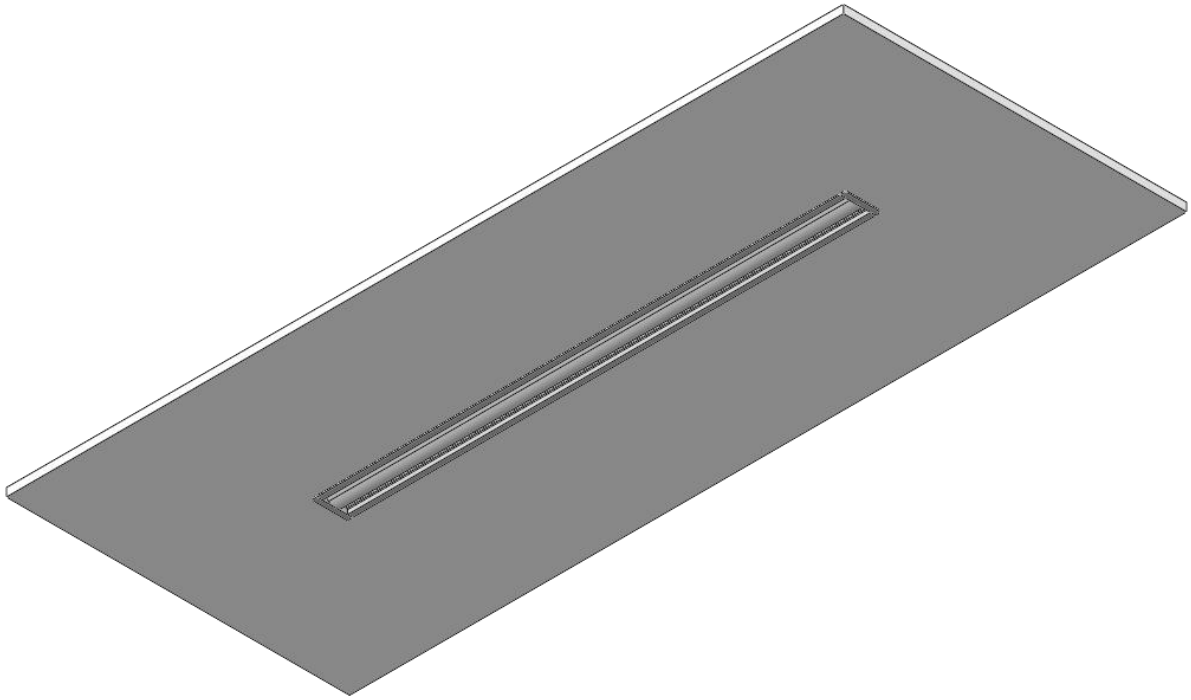

Installation is complete. Lights can be Turned On!

Additional Note: For purpose of maintenance remove the fixture by pulldown the fixture and disconnect the cable 2 connection with other Illios Grazer Recessed. As shown in the figure below.

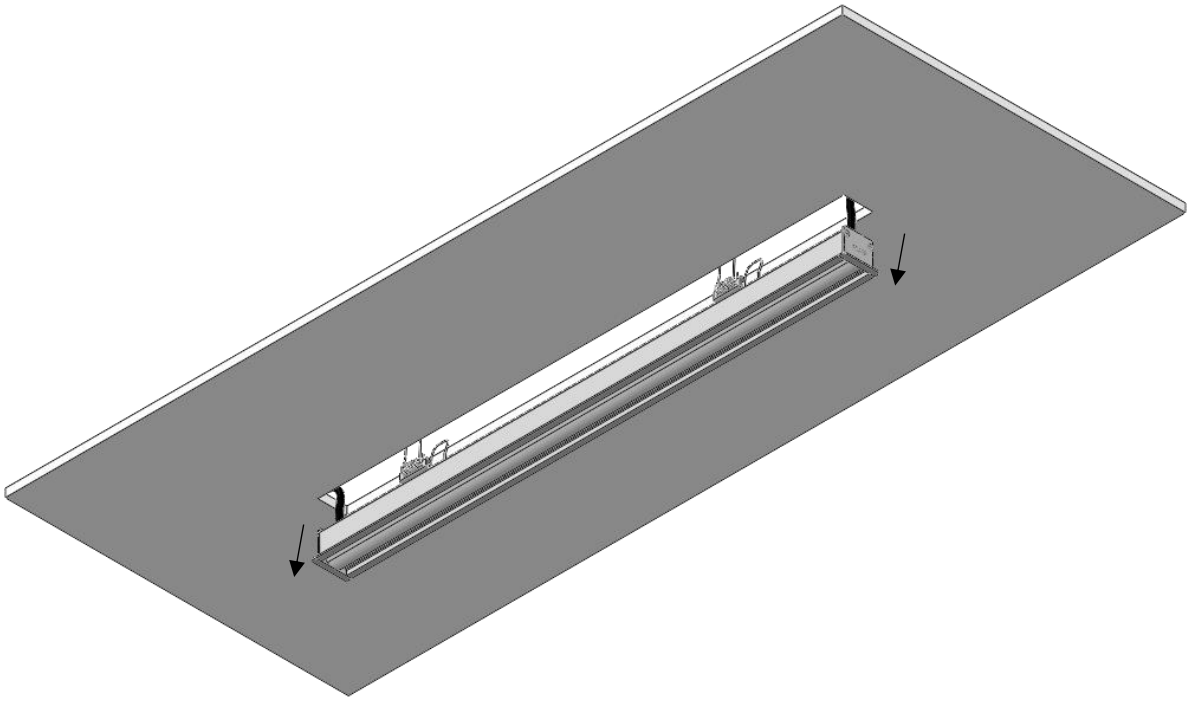

After maintenance work install back the fixture at its original position.