Nano One Flat Adjustable Recessed Installation Manual

Step 1: Make cutout in ceiling with hole saw cutter. The ceiling thickness should be 10 mm.

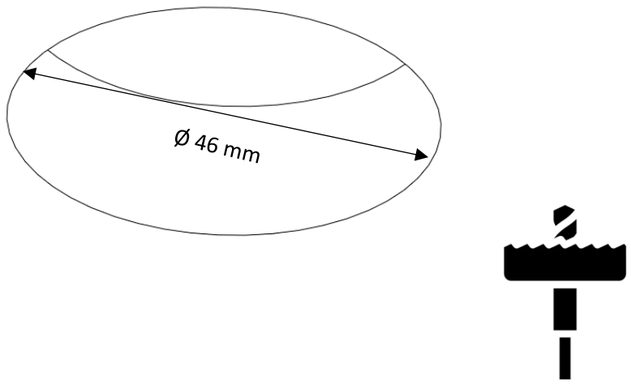

Step 2: Take out main supply cable through cutout.

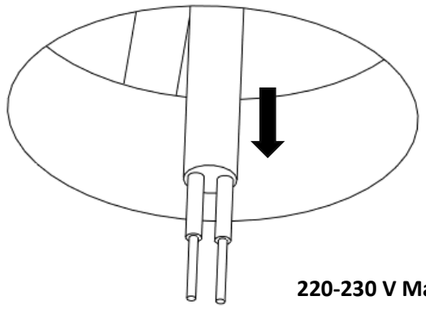

220-230 V Main Cable

Step 3: Connect the main supply cable to the driver.

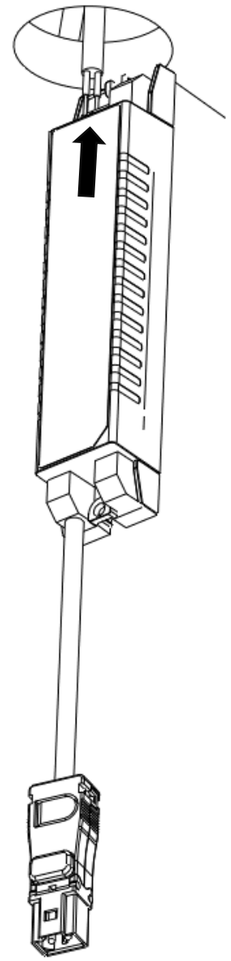

Step 4: Connect the fixture to the driver with the help of a quick connector.

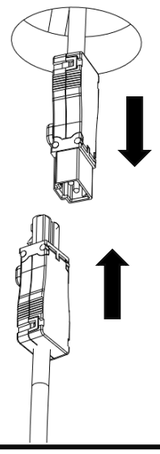

Connector

Step 5: Press the toggle and insert the fixture into the cutout.

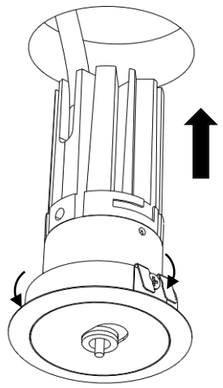

Step 6: Installation completed.

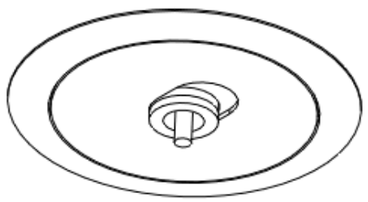

Step 7: Hold the fixture and remove the security plug from the fixture.

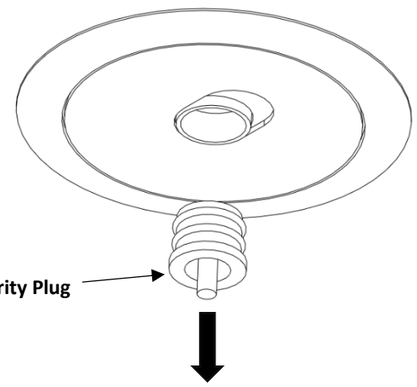

Security Plug



Step 8: For rotation, use a finger.

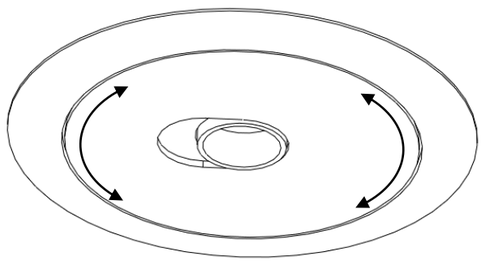



Date: 05.12.2025/ Rev:00

Step 9: For the adjustable, insert the tool into the cap. Adjust the fixture.

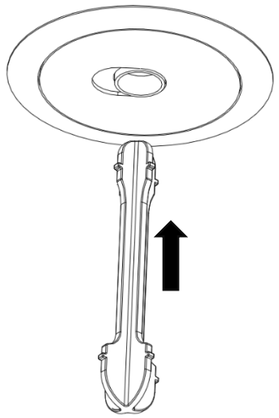

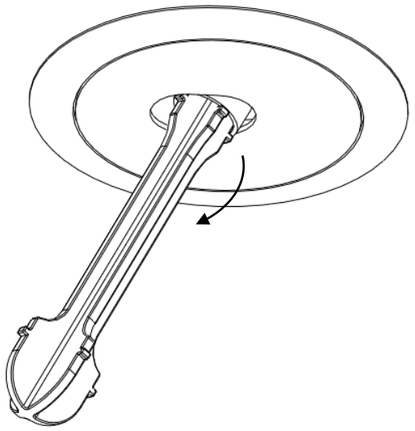

Maintenance Instruction

Step 10: Insert the security plug into cap.

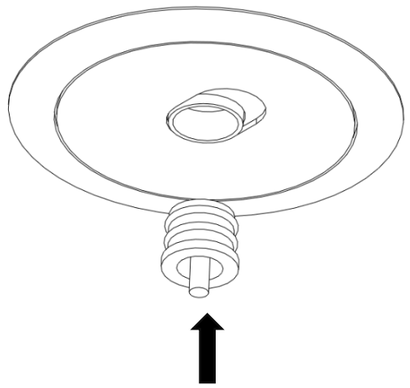

Step 11: Then pull the engine from the ring. If maintenance is done, then insert the engine into the ring.

