

Axis-M_ Recessed INSTALLATION MANUAL


Step 1: Cut out of Diameter 104.5mm in the ceiling as shown in the below figure.

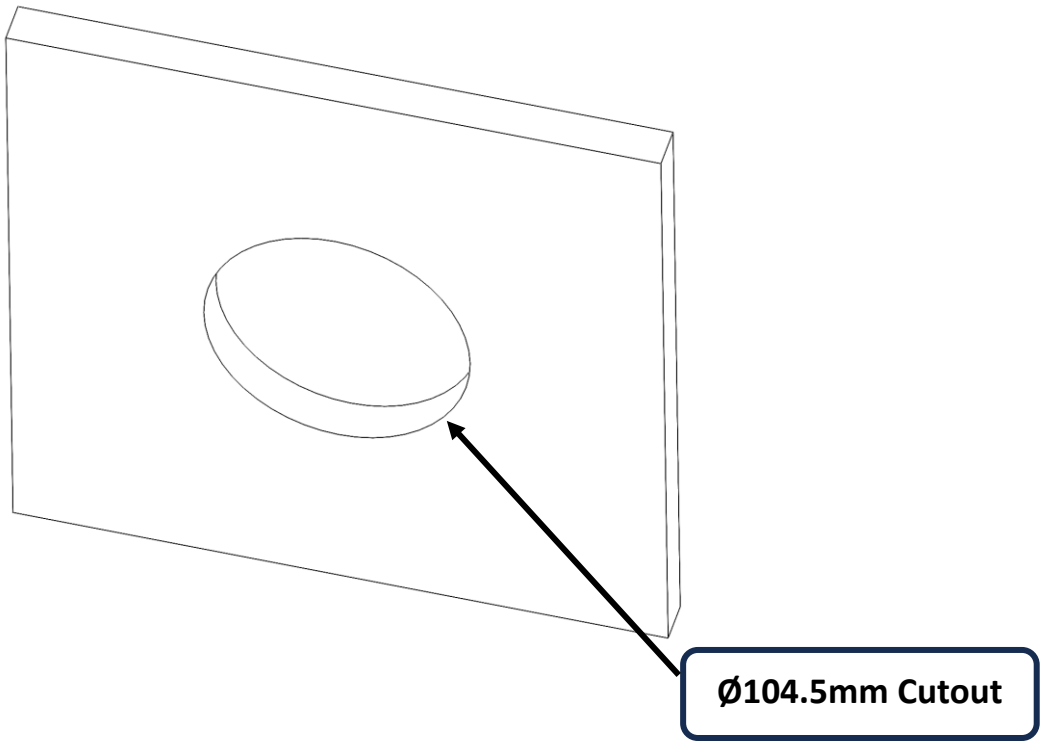


Step 2: Position and lock the frame by applying pressure to the toggle spring.

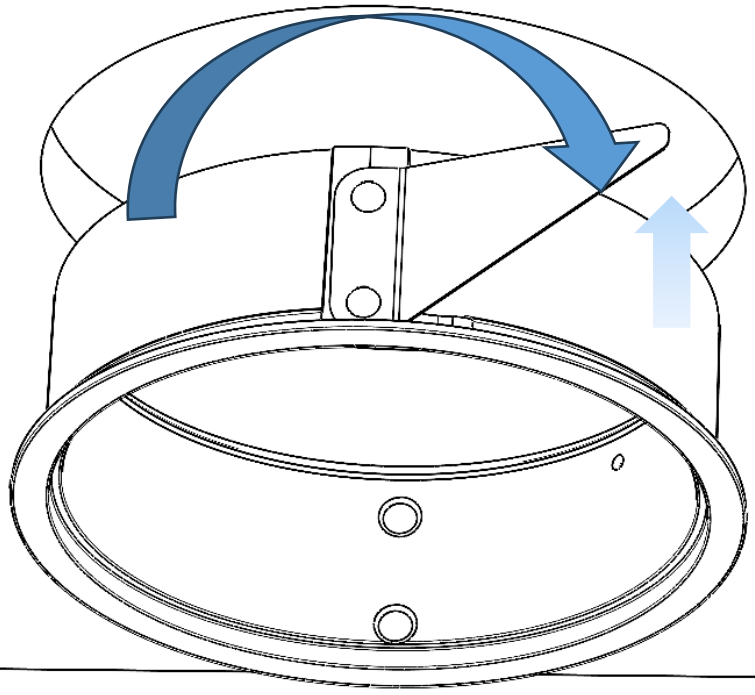


Step 3: When We screwed then after apply POP Wall Putty on visible screw area.

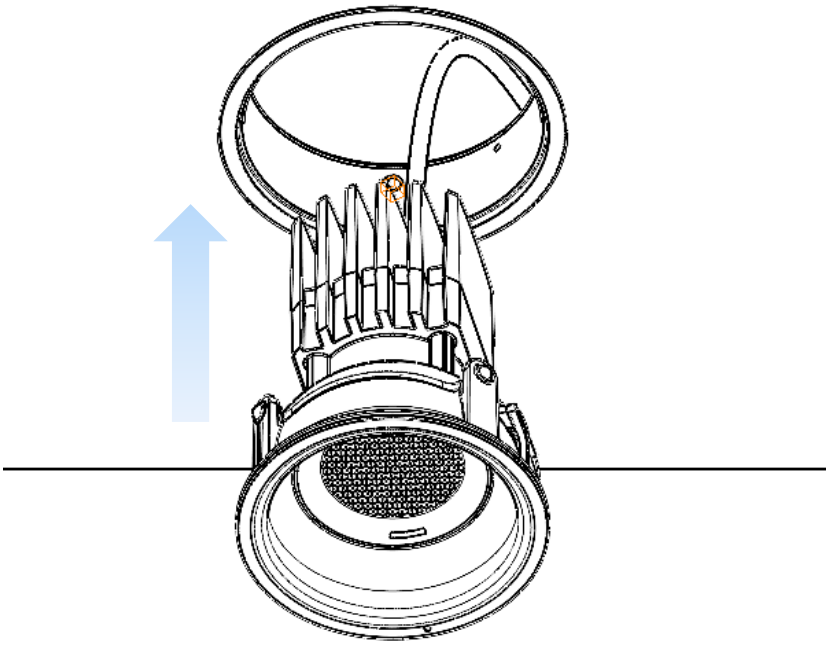



Step 4: For Adjusting the fixture, first remove the cap from as shown in figure.

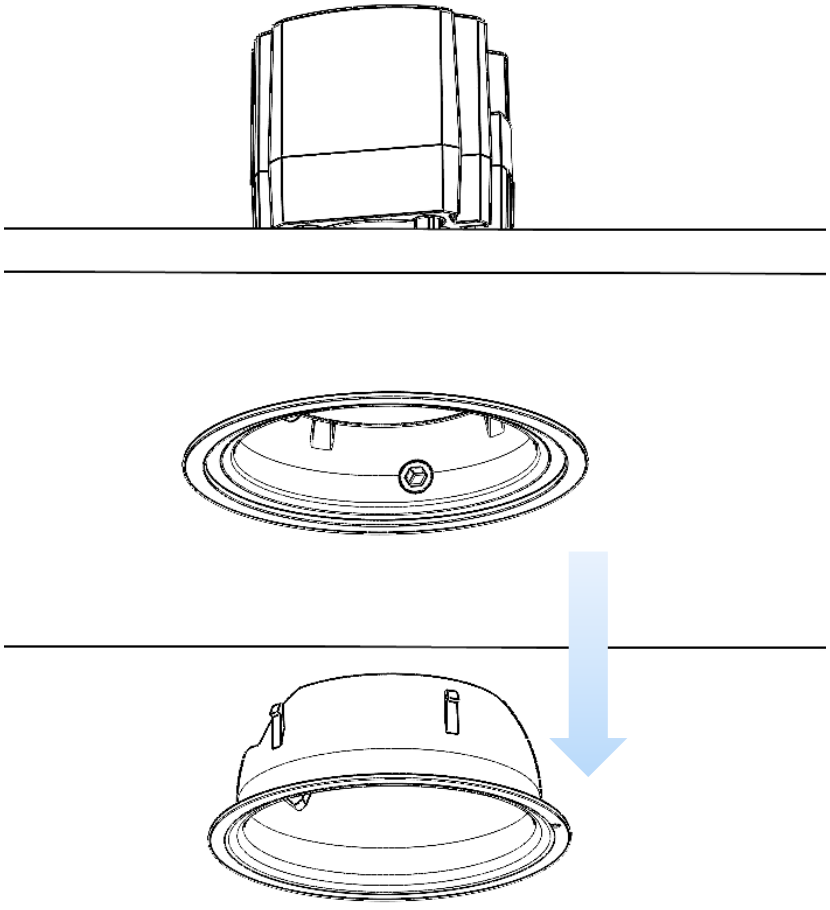



Step 5: For Adjusting the fixture angle, first remove the cap as shown in figure.

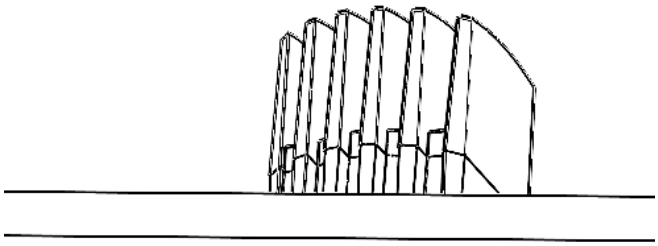


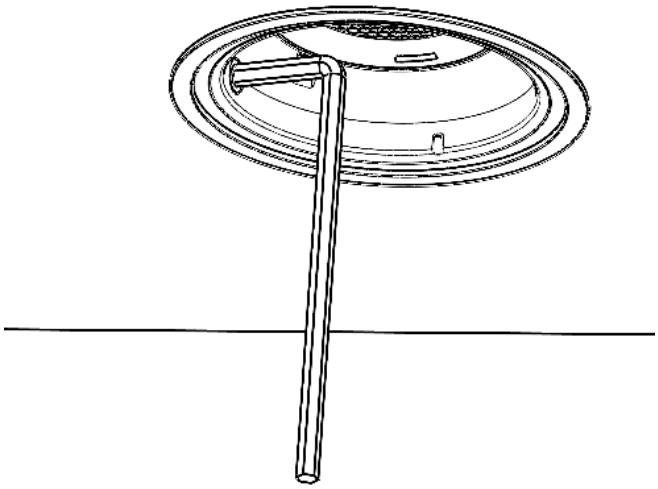

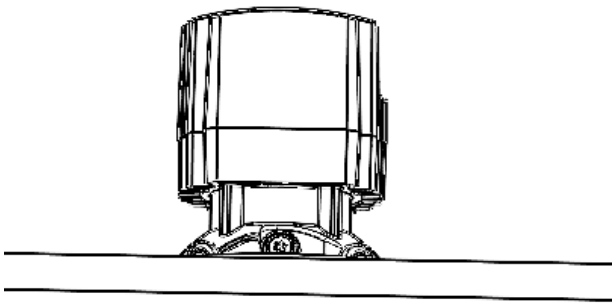


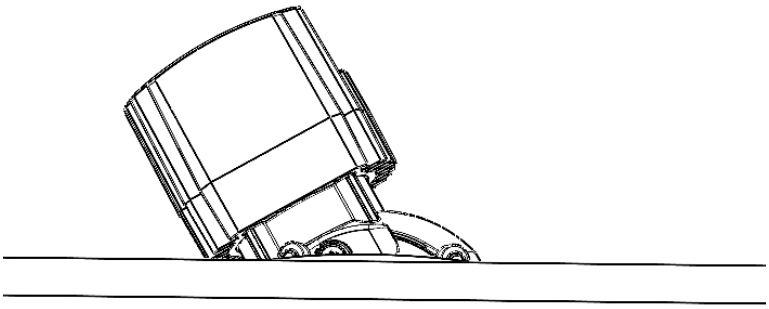


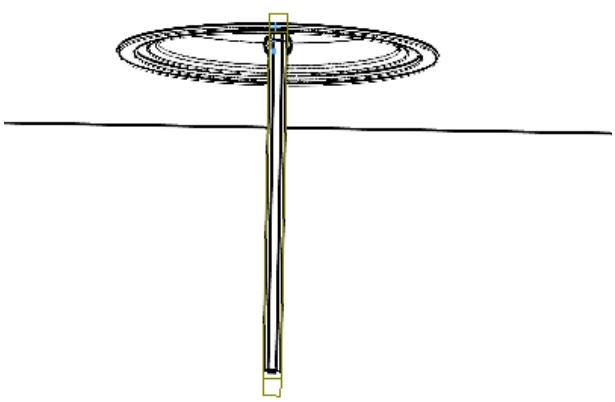


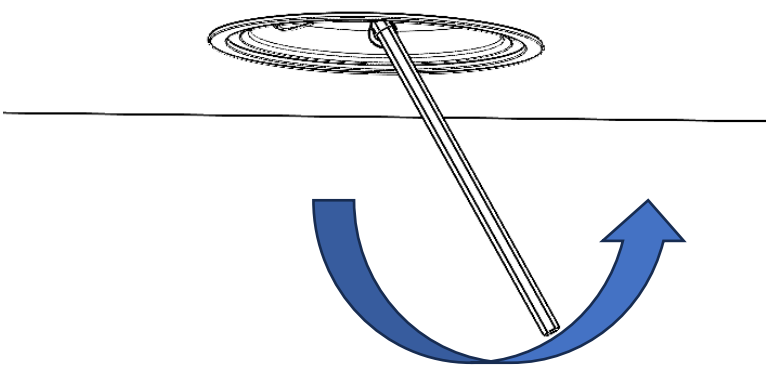


Step 6: After tilted fixture we can rotate 358Deg as per requirement shown in figure.

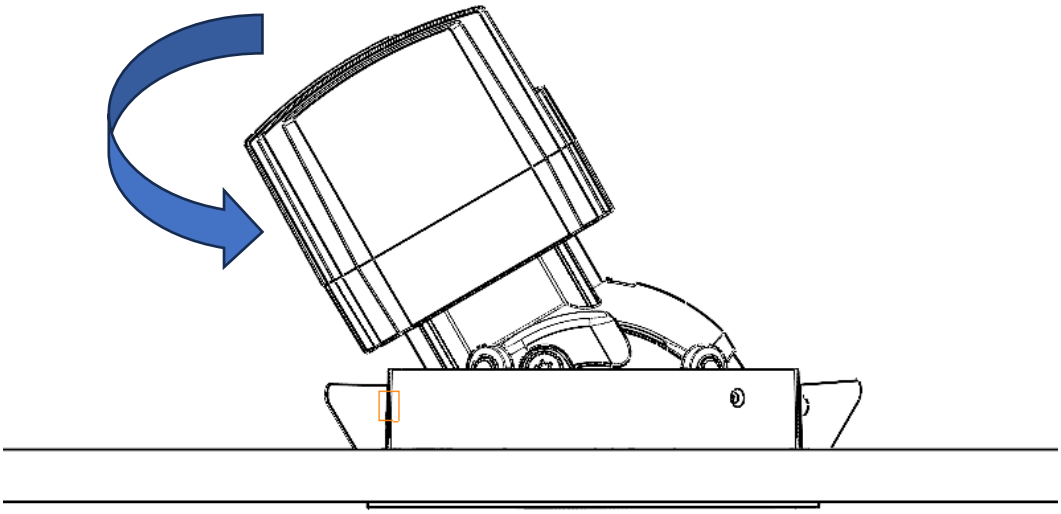

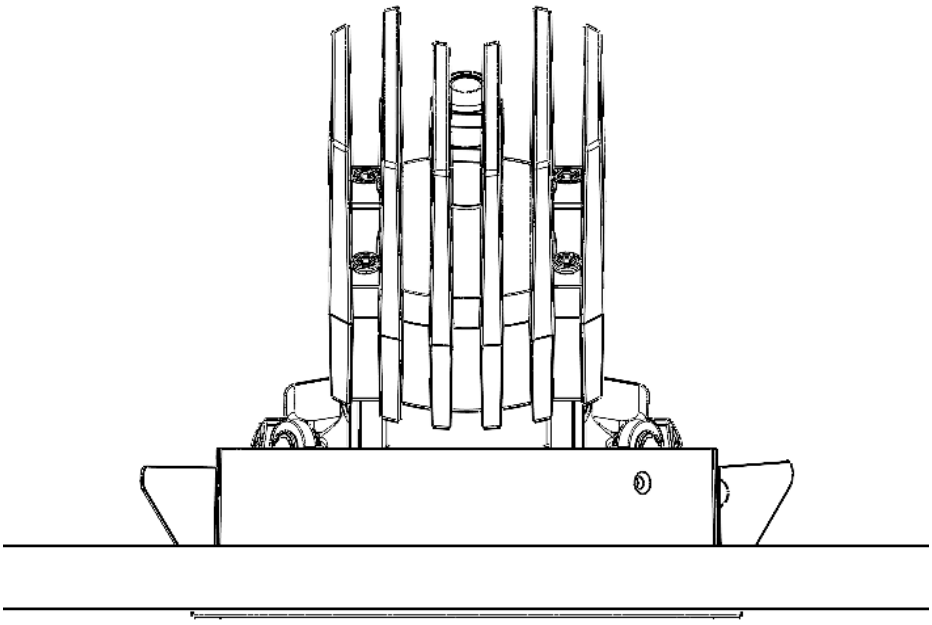

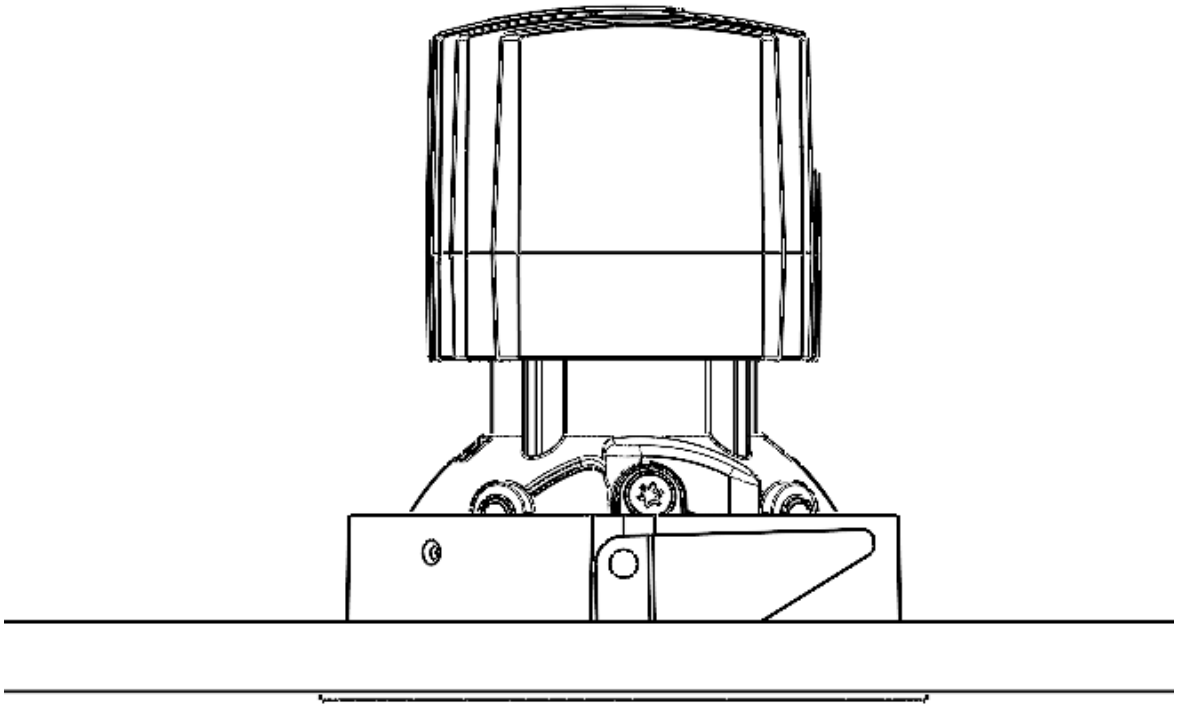

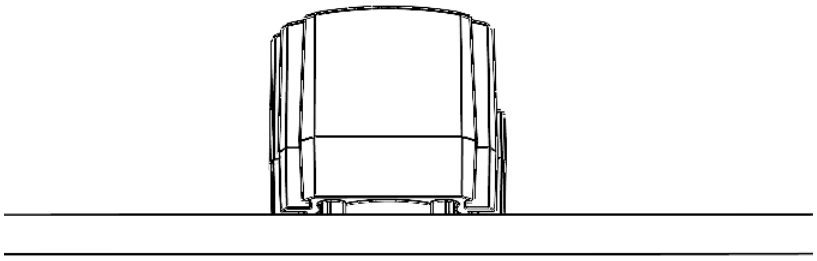



Installation completed. The lights can be turned on!