

Tumblerr Wall Mounting Installation Manual (Non Integrated Driver)


Step 1 : Create hole Ø30 mm in the wall as shown in below figure.

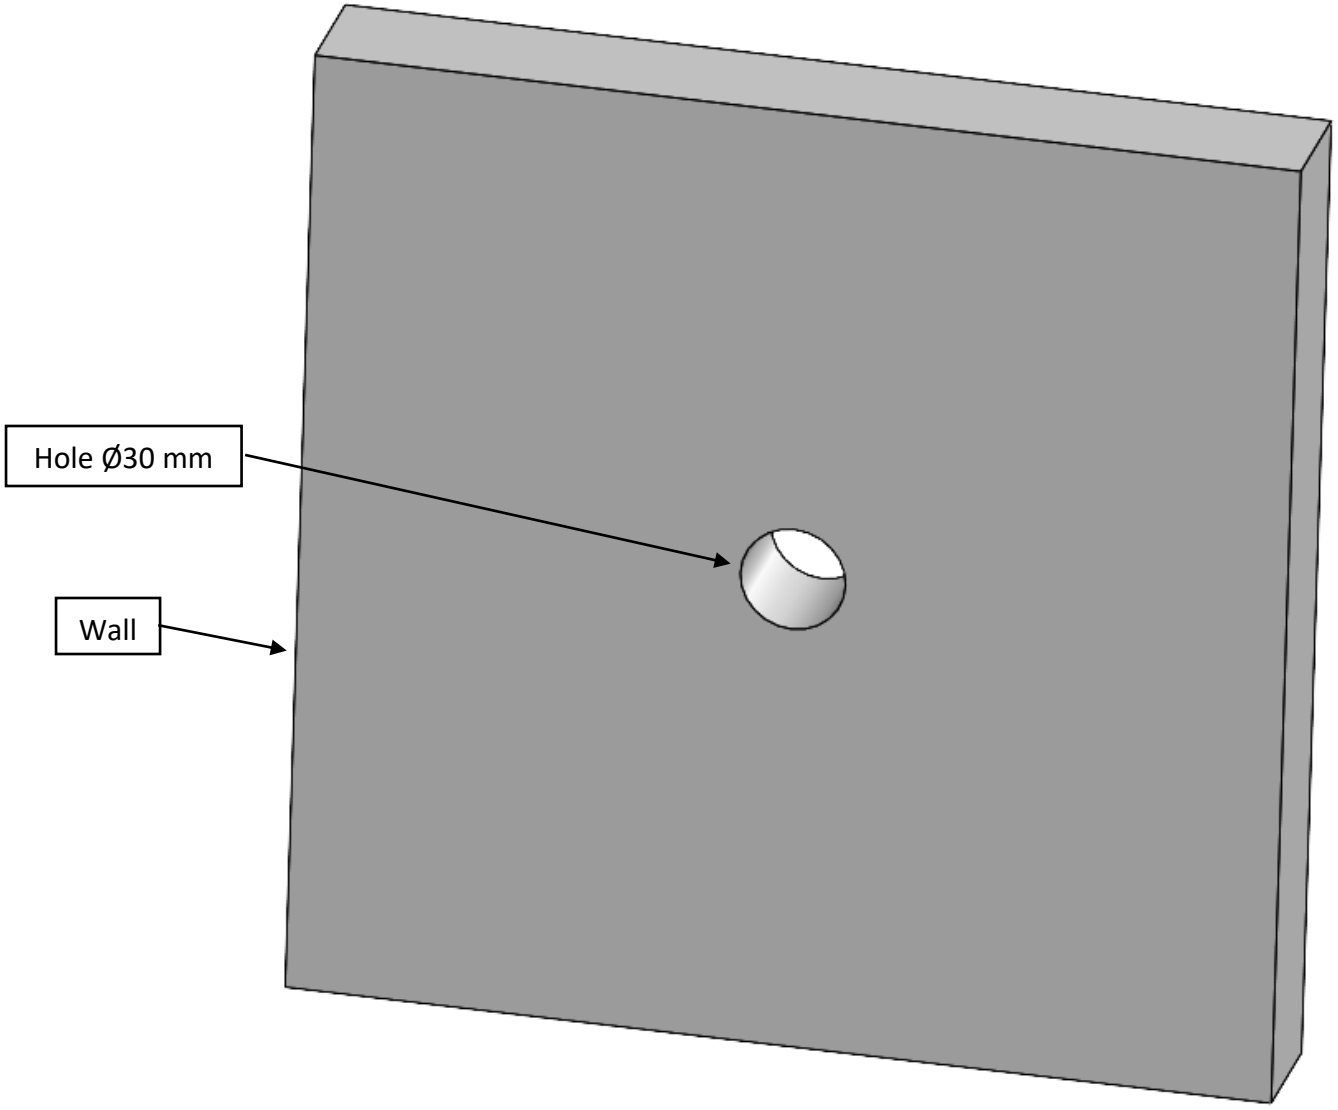


Step 2 : Create 3 hole for wall mounting screw by using base bottom in the wall as shown in below figure.

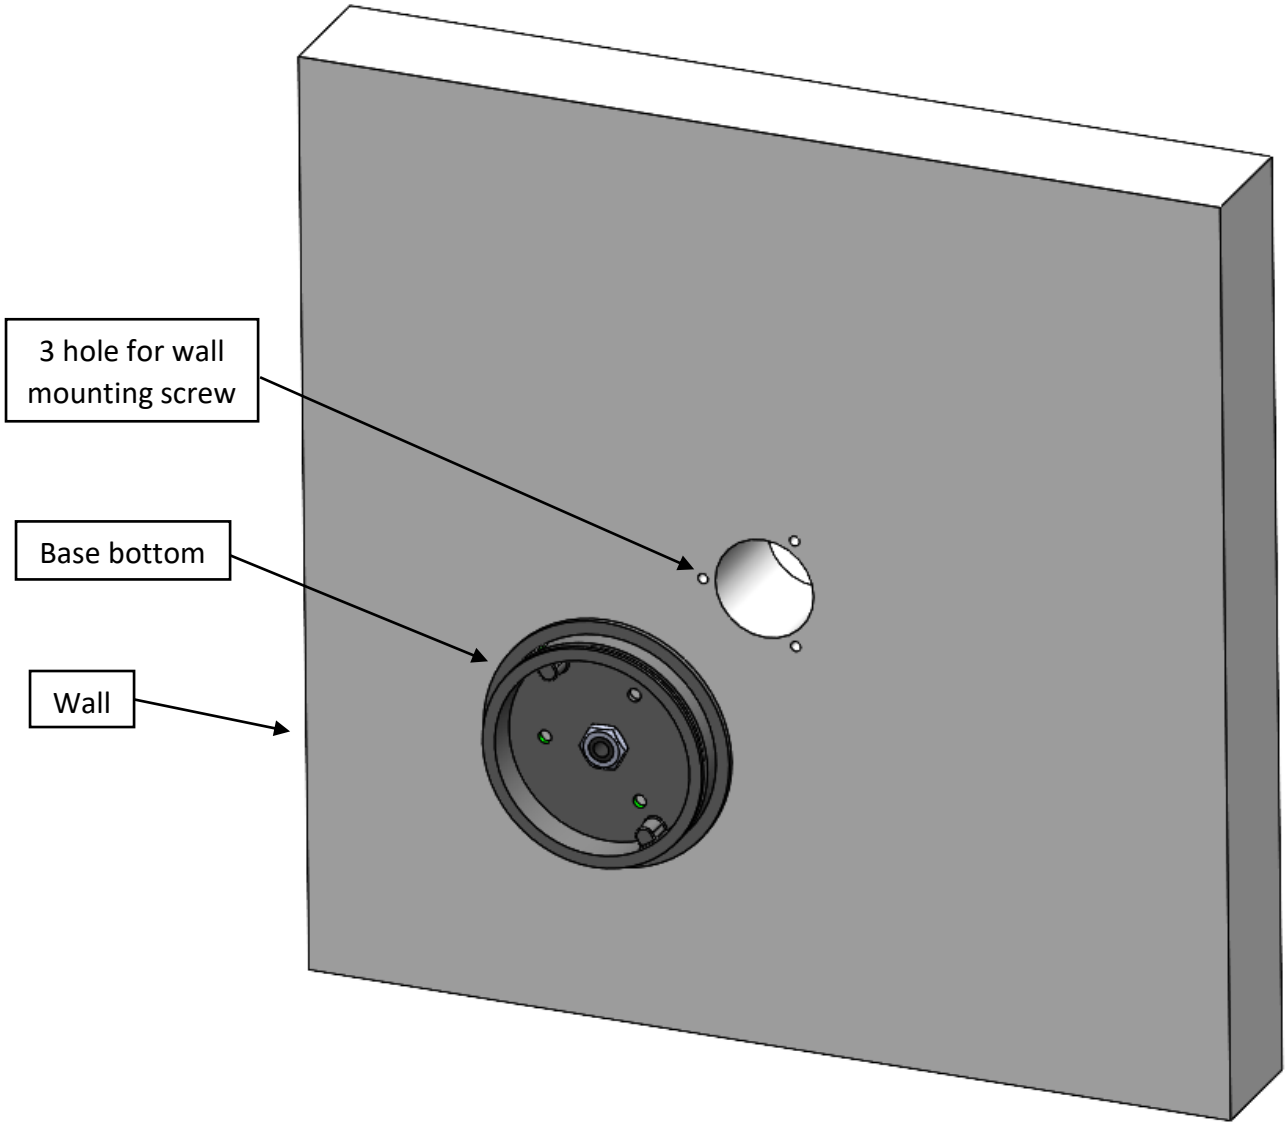


Step 3 : Connect ip connector with main supply wire as shown in below figure.

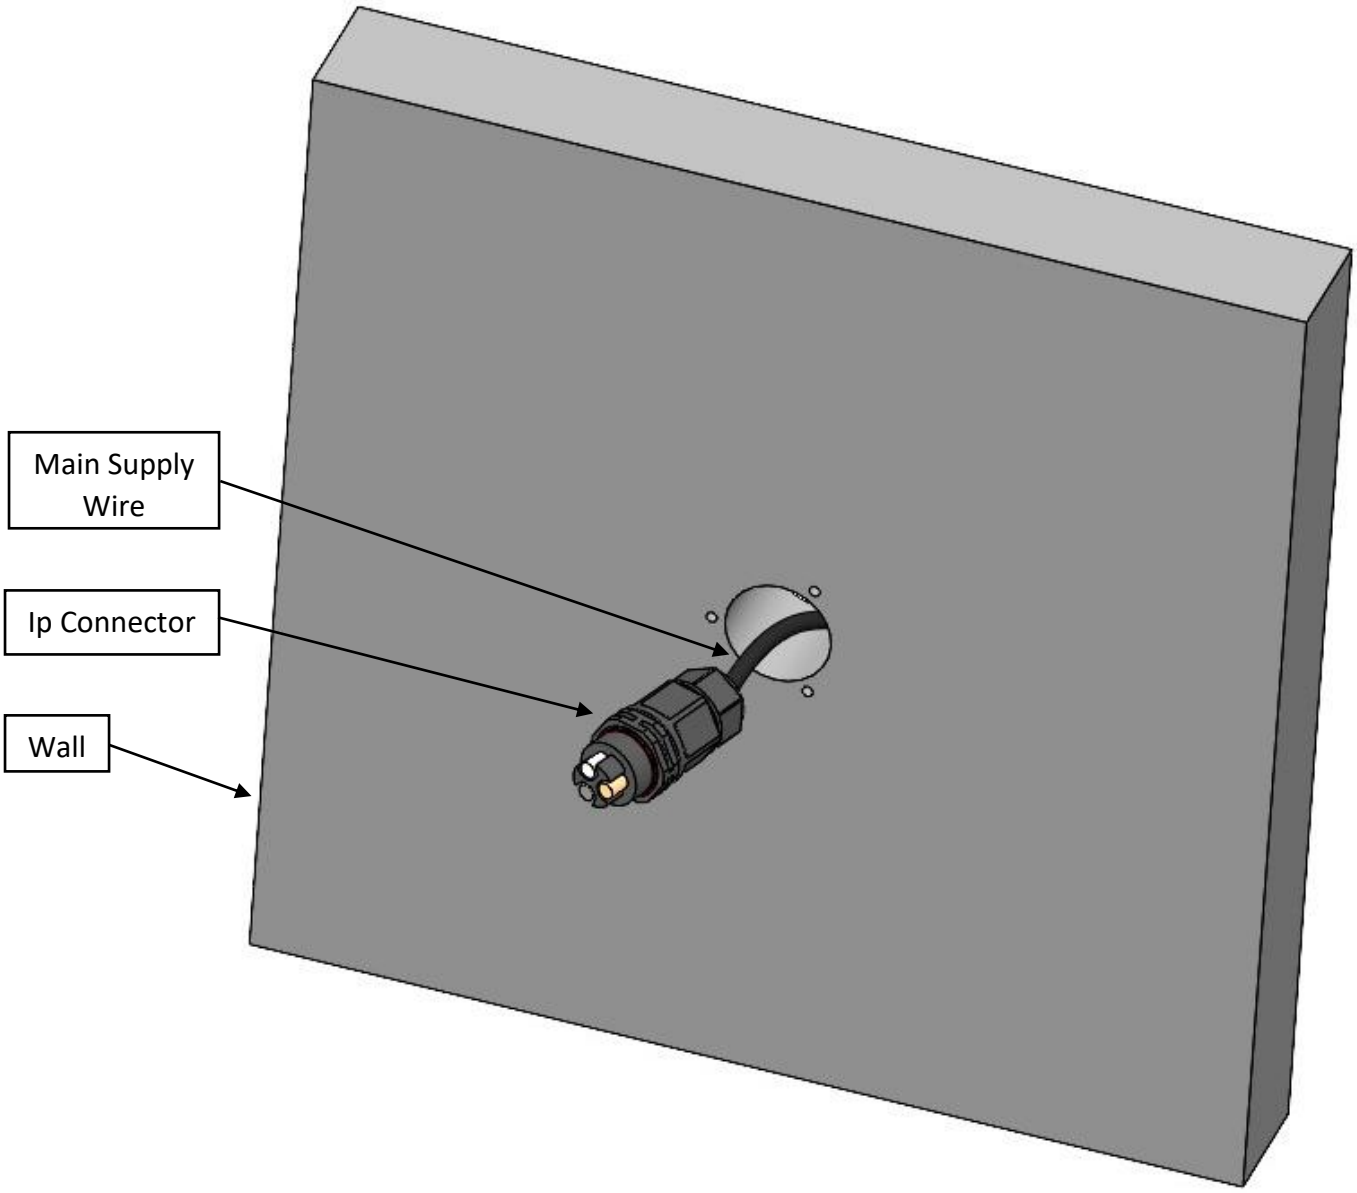


Step 4 : Take IP driver with IP connector after that connect driver with main supply wire by using male and female IP connector as shown in below figure.

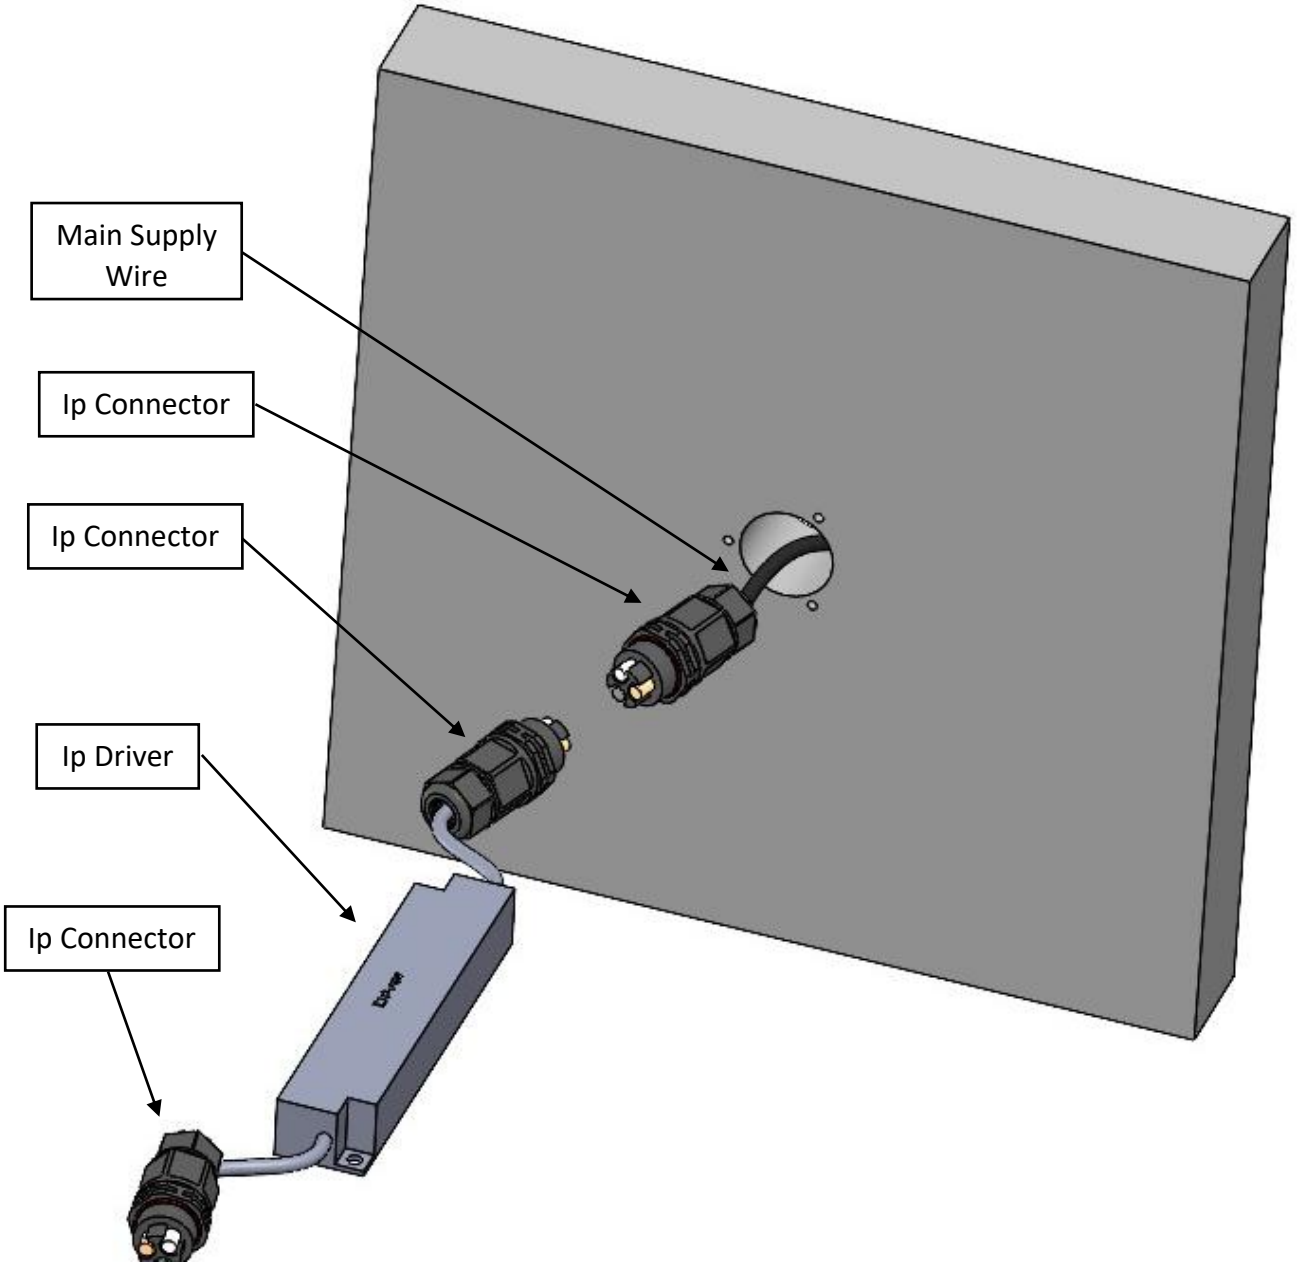


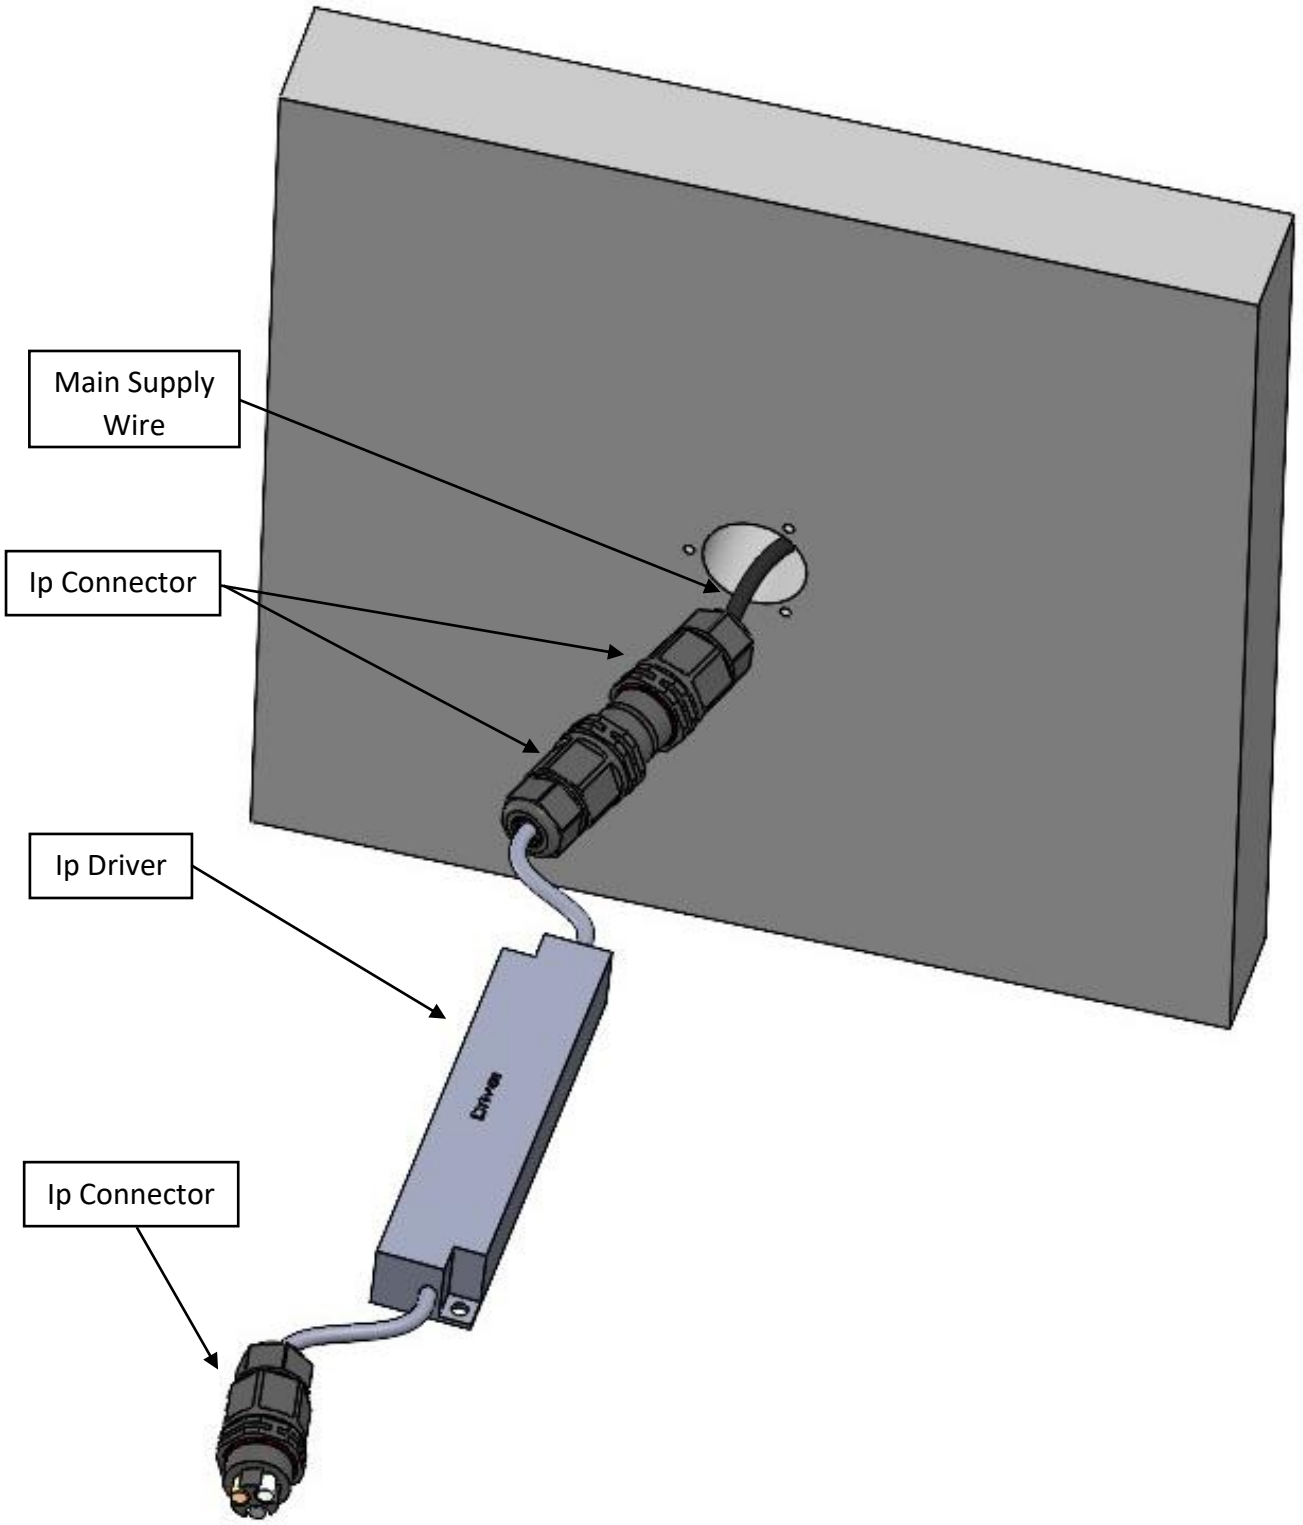

Main Supply Wire
Ip Connector
Ip Driver
Ip Connector
Driver

Step 5 : Connect fixture dc supply wire with driver by using male and female IP connector as shown in below figure.

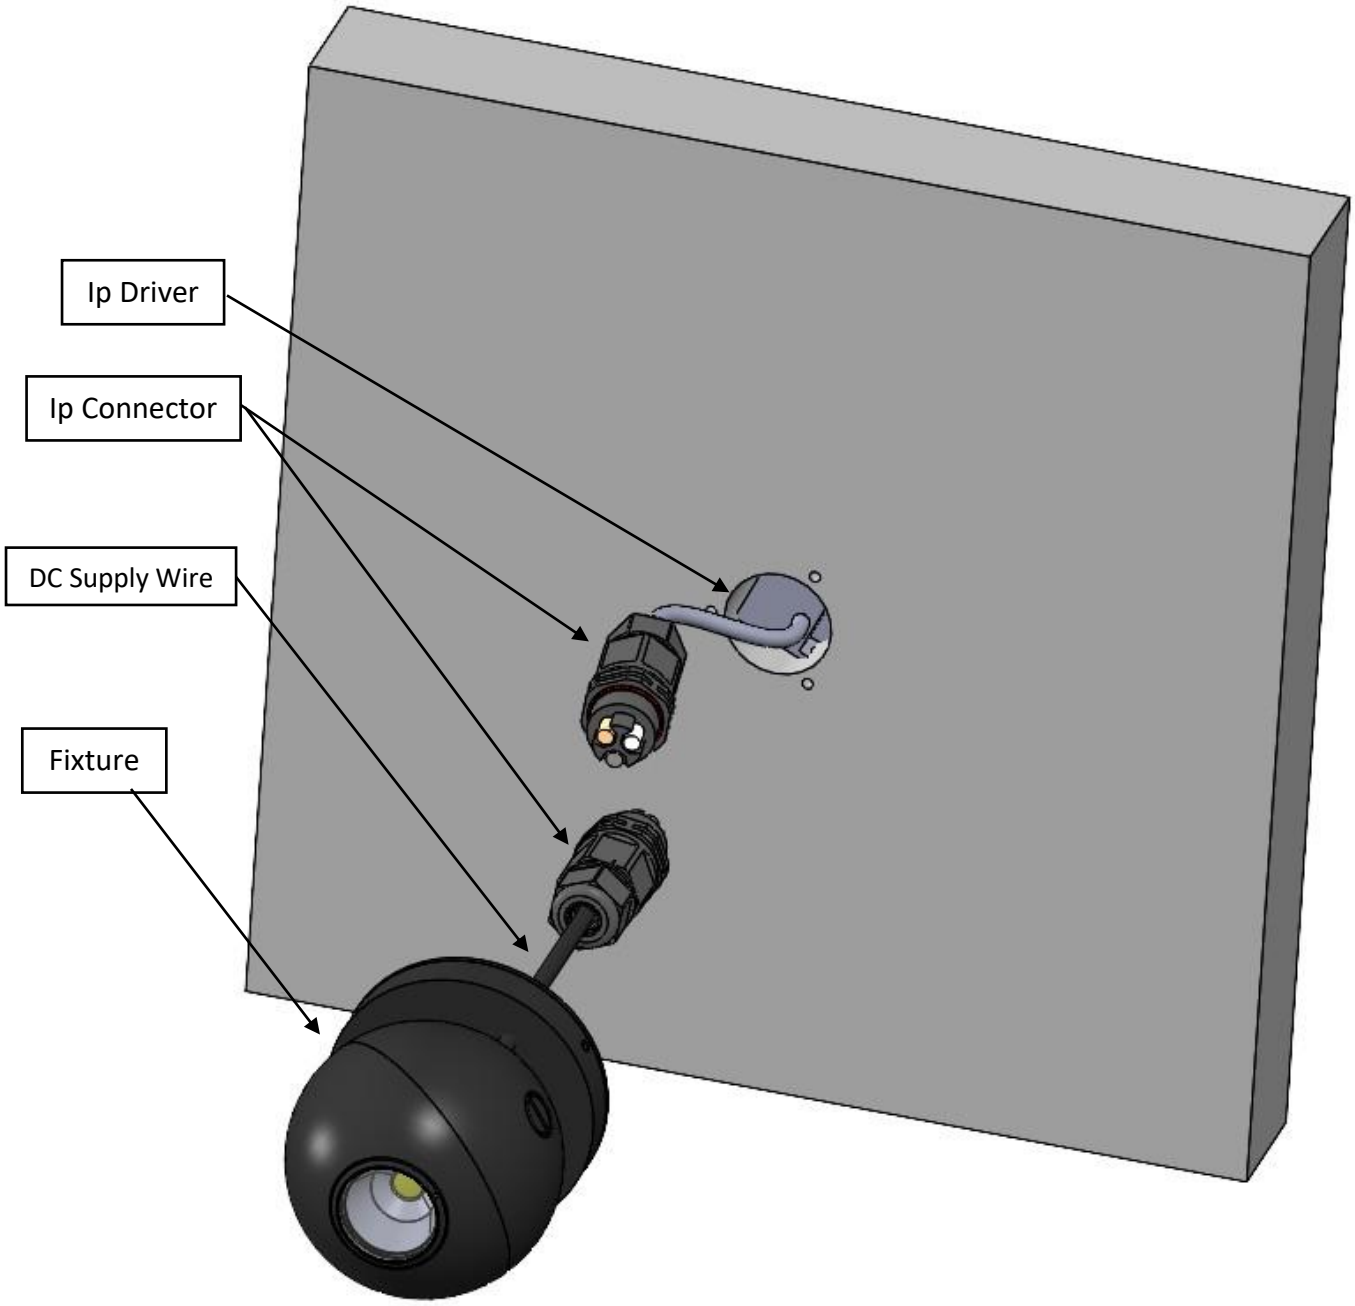


Step 6 : Base bottom fix with wall by using 3 wall mounting screw with o-ring as shown in below figure.

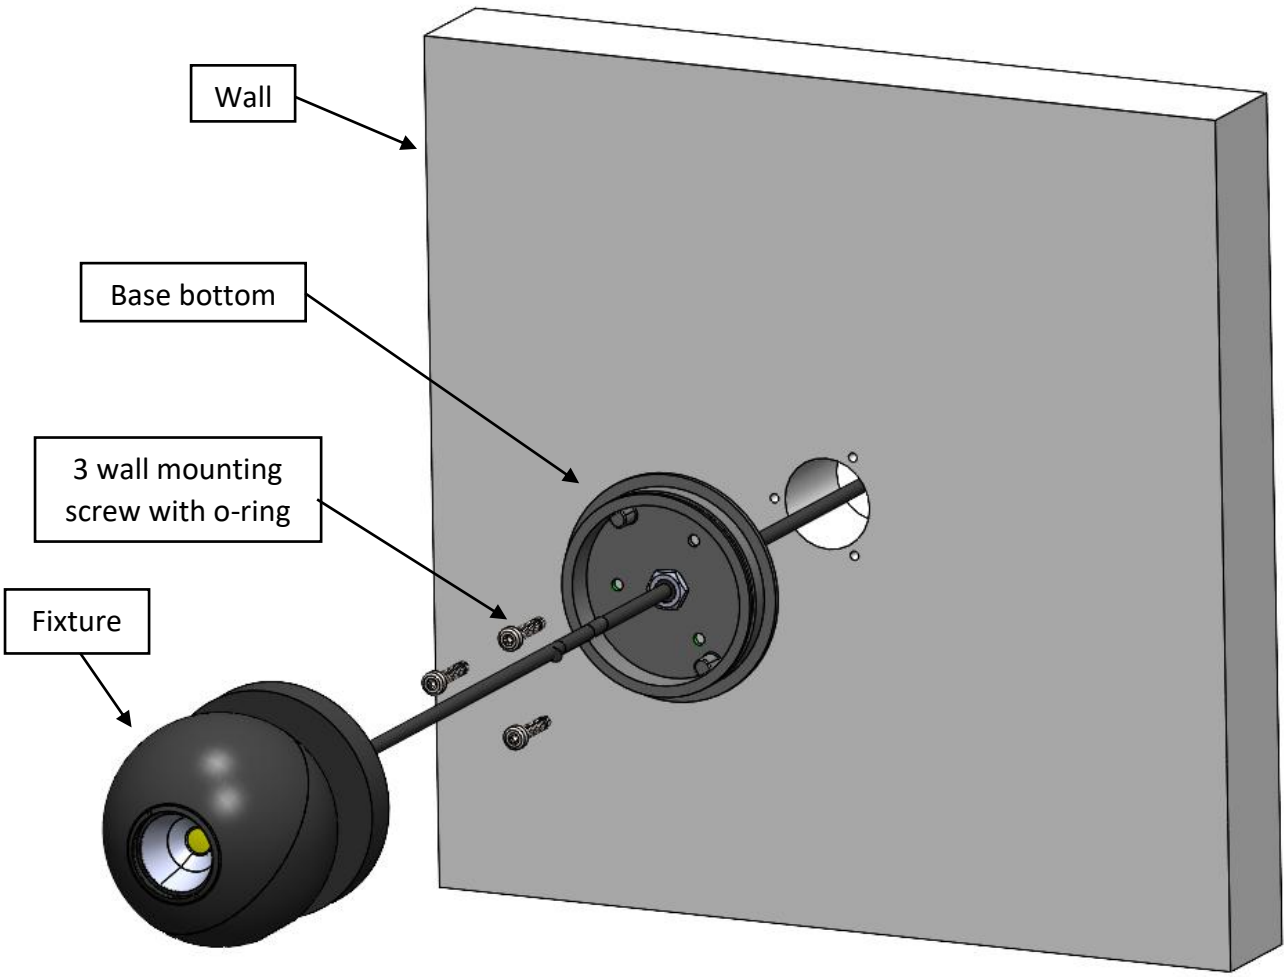


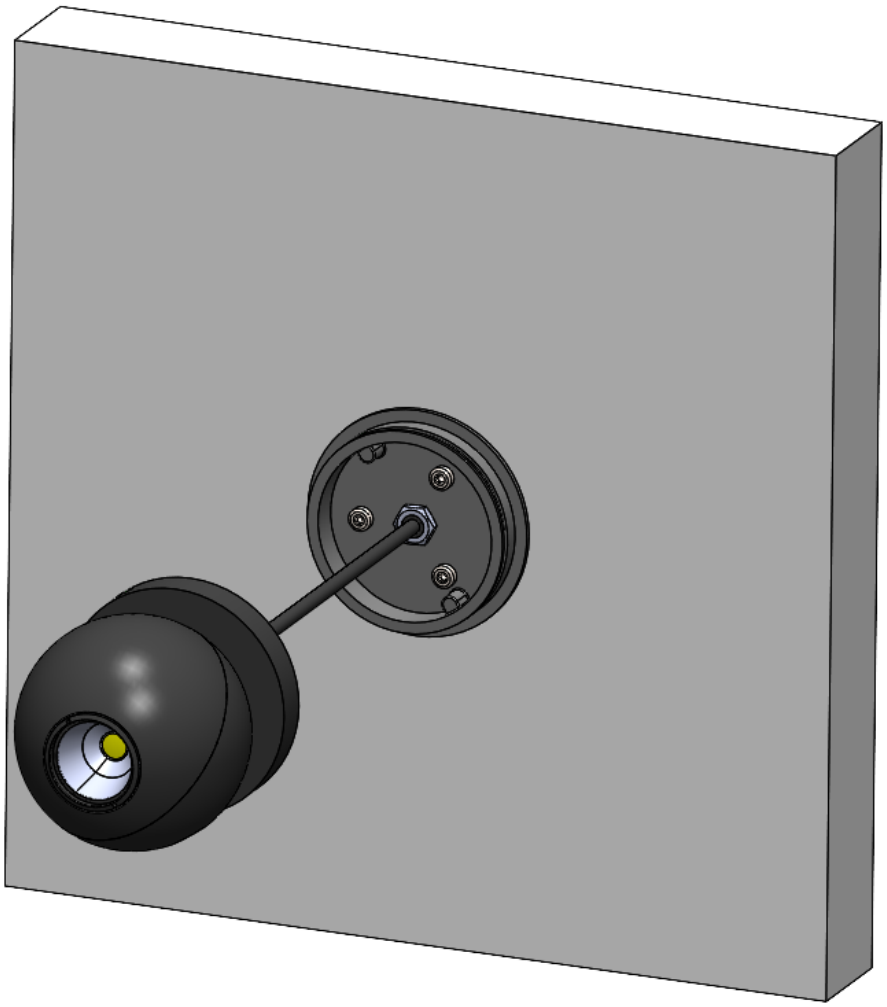


Step 7 : Fixture assemble with base bottom by using 2 grub screw as shown in below figure.

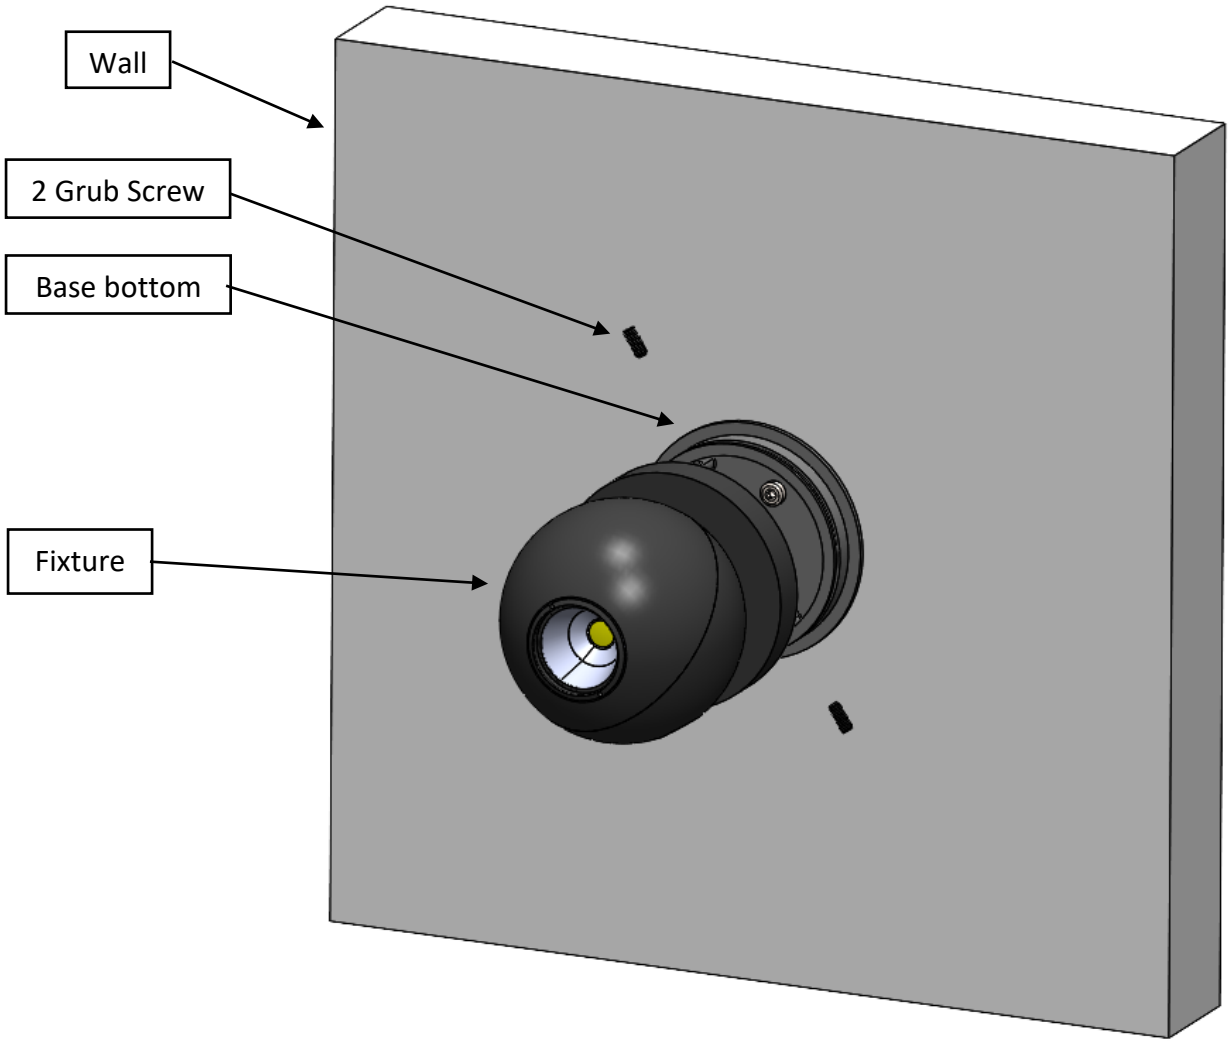

Step 8 : Rotate fixture by holding bottom part as per requirement, set your light spot.

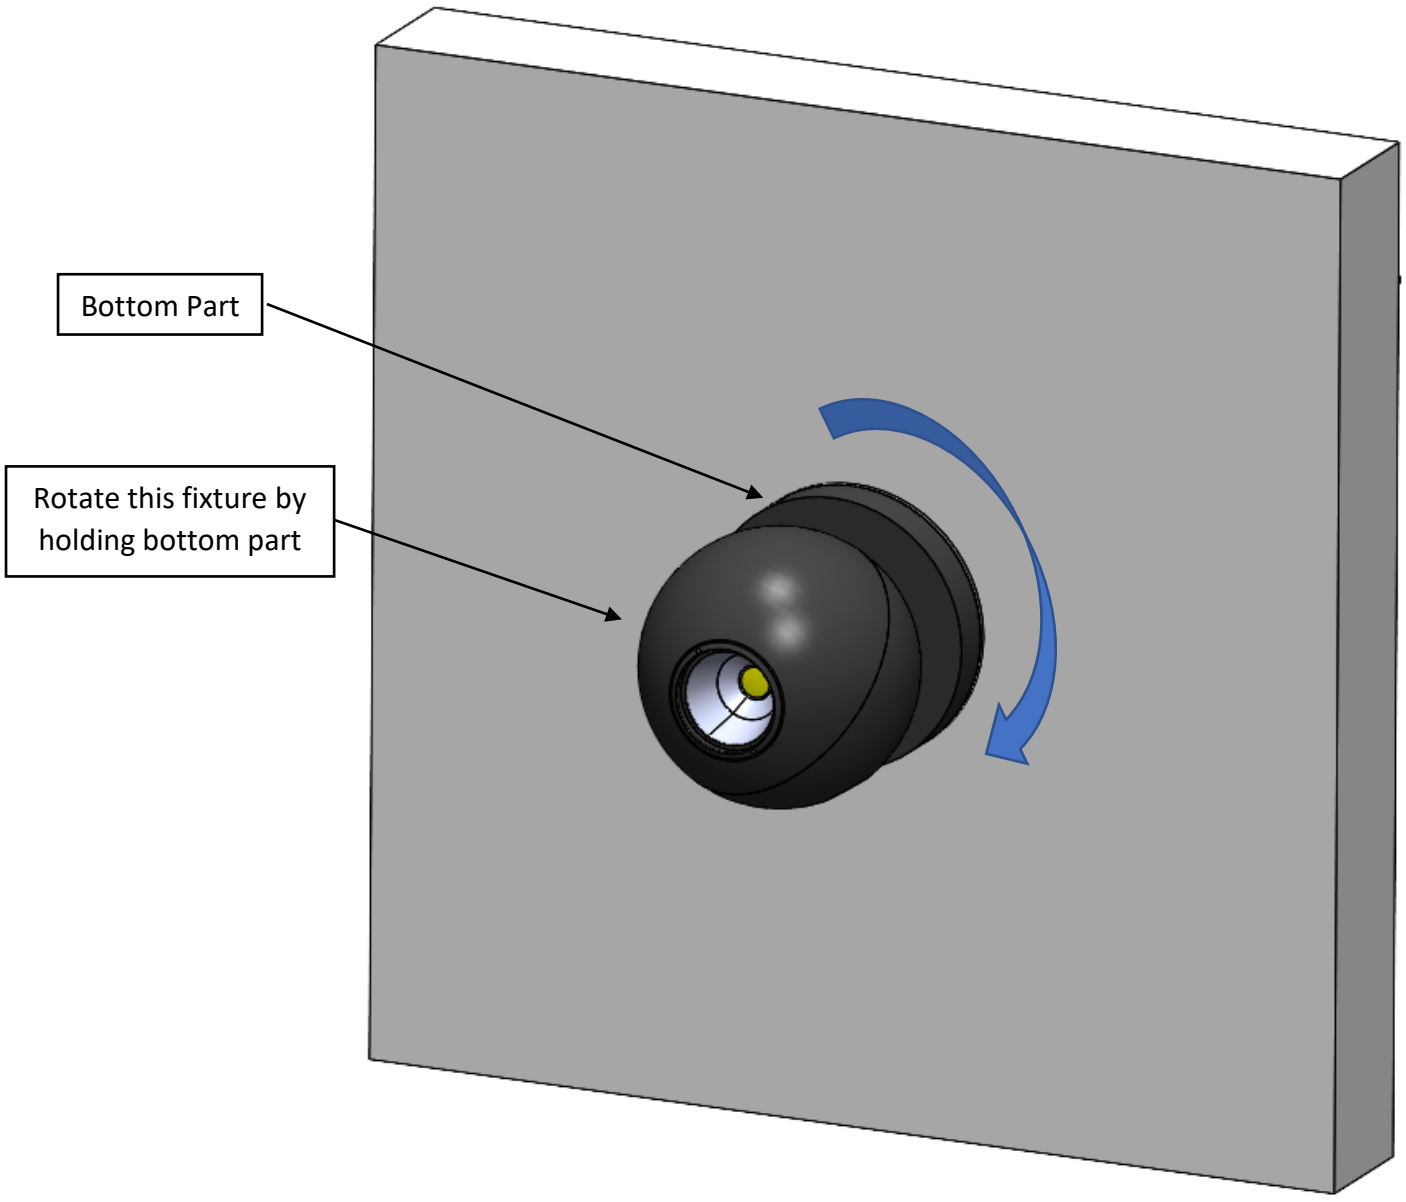

Step 9 : Rotate top sphere by holding bottom sphere as per requirement, set your light spot.

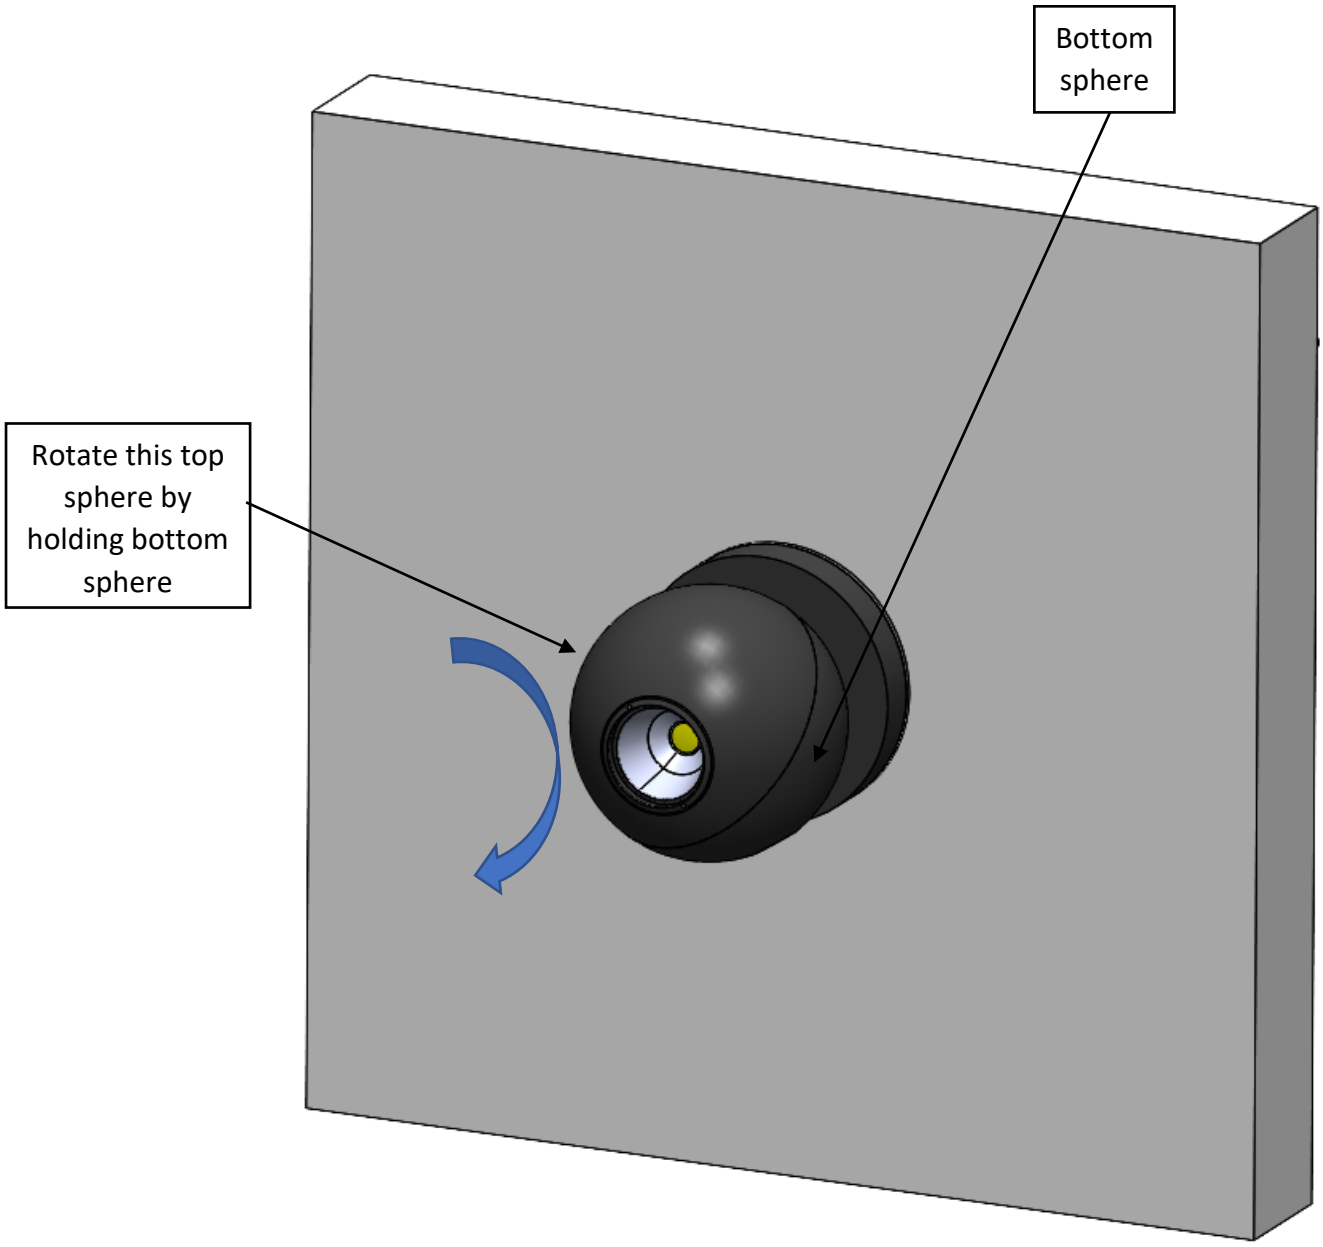

Installation is complete. Lights can be Turned On!