Deeper M Spike Installation Manual

Step 1: Insert the spike assembly on ground.

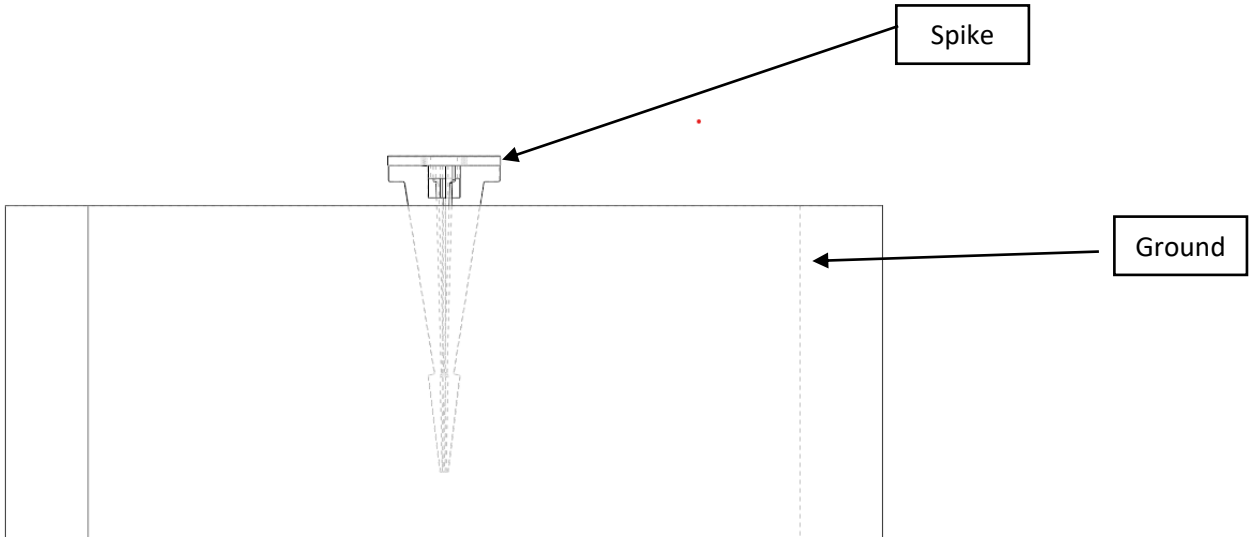


Fig.1

Step 2: Base Packing plate assemble with spike with M4x8mm Allen Key.

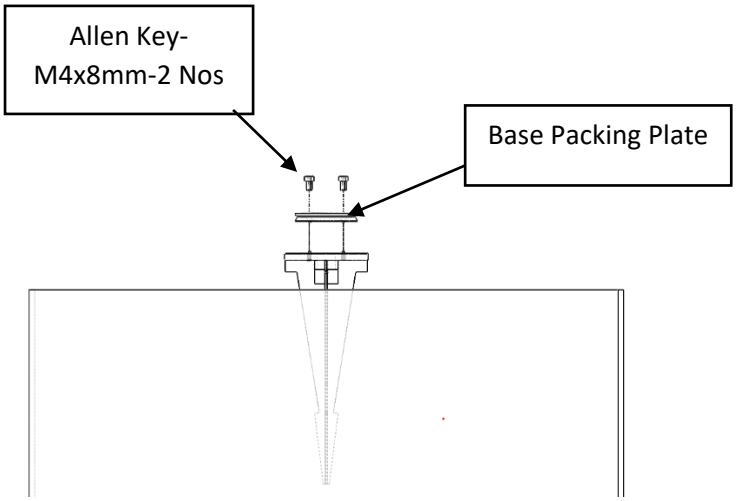


Fig.2

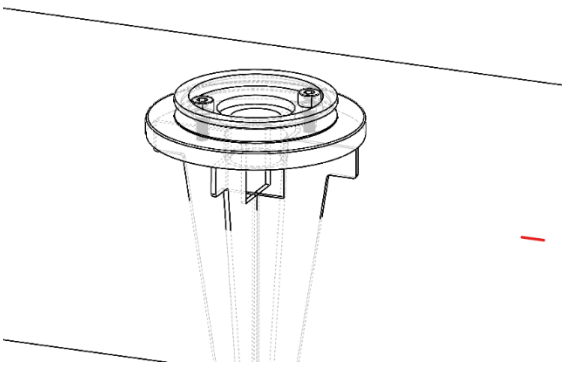


Fig.3

Step 3: Fixture wire insert in Spike according to fig.4 and fix the fixture above the spike.

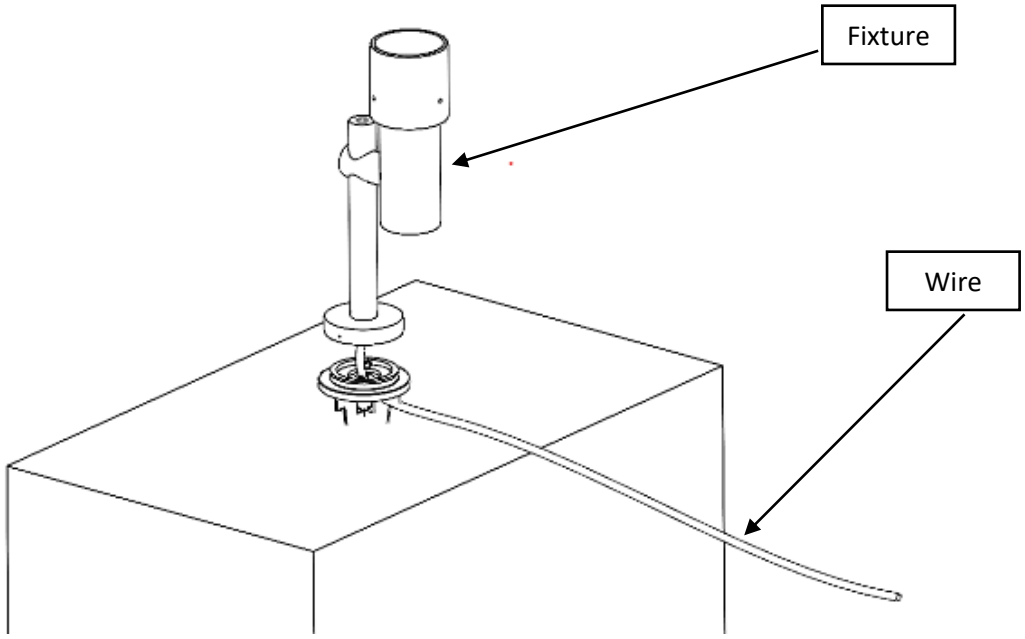


Fig.4

Step 4: Grub Screw M3x6 can fit on Floor Base.

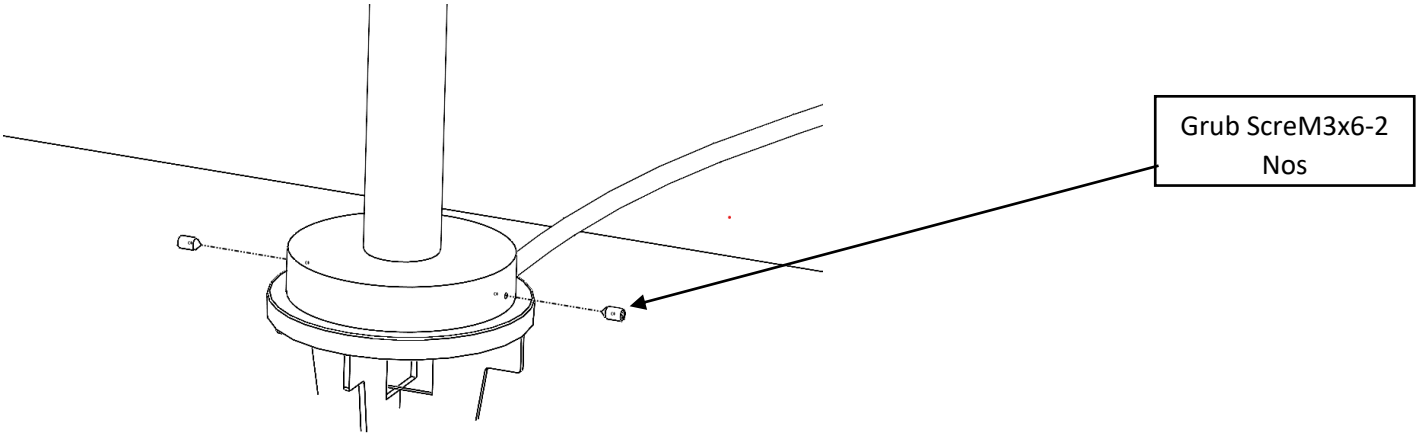


Fig.5

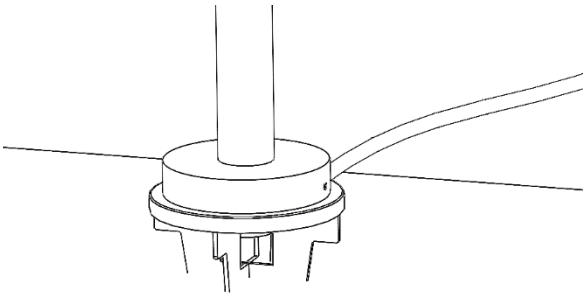


Fig.6

Step 5: IP Gland Fit on fixture Wire.

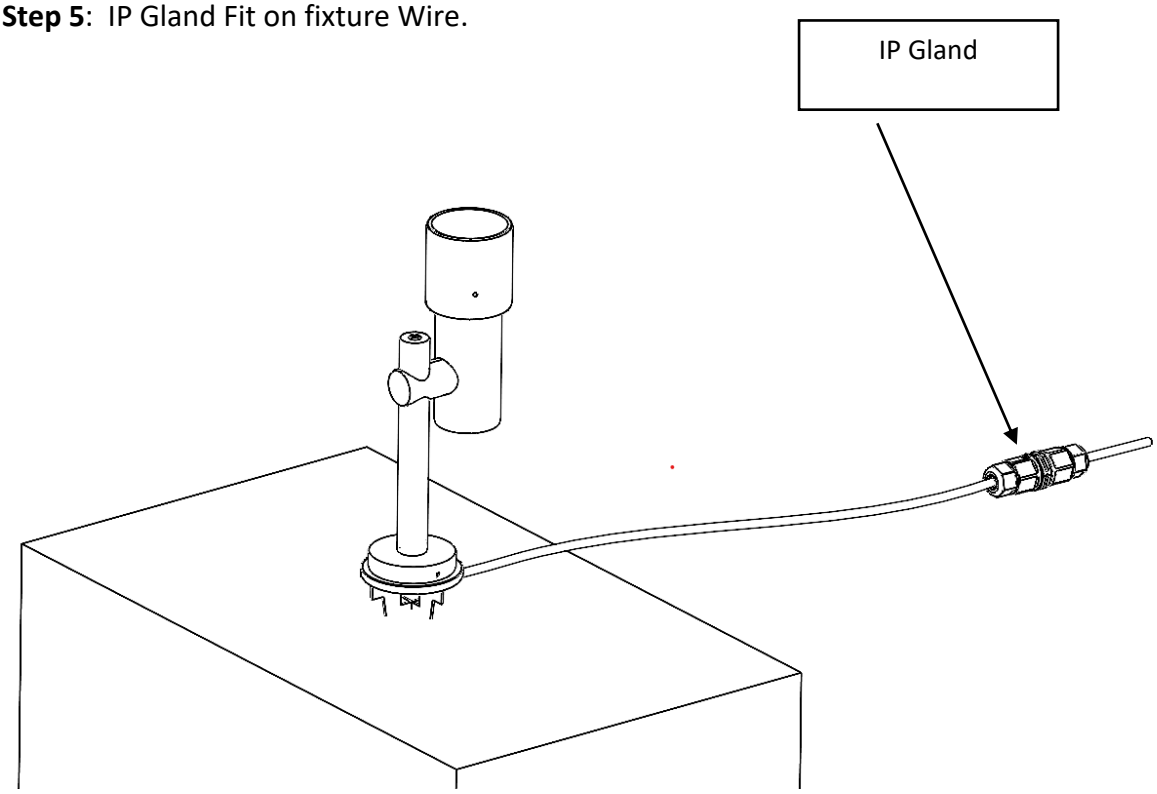


Fig.7

Step 6: Ip Driver fix the Driver Housing and connect the wire in IP Connector.

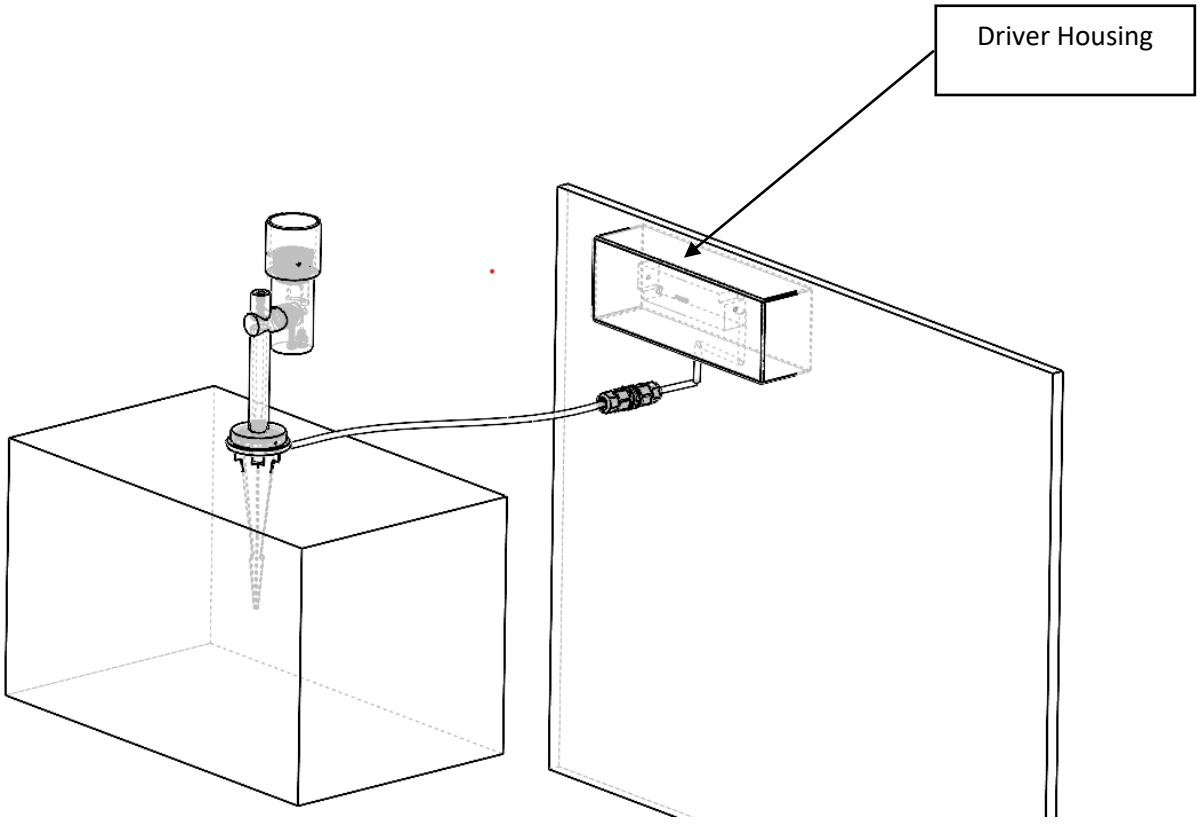


Fig.8

Step 7: Rotate fixture for your convenience, set your light spot.

Rotation: Loose the Allen Screw 1 and rotate fixture for your Convenience, after setup pls tight the Screw.

Tilt: Loose the Allen Screw 2 and Tilting fixture for your Convenience, after setup pls tight the Screw.

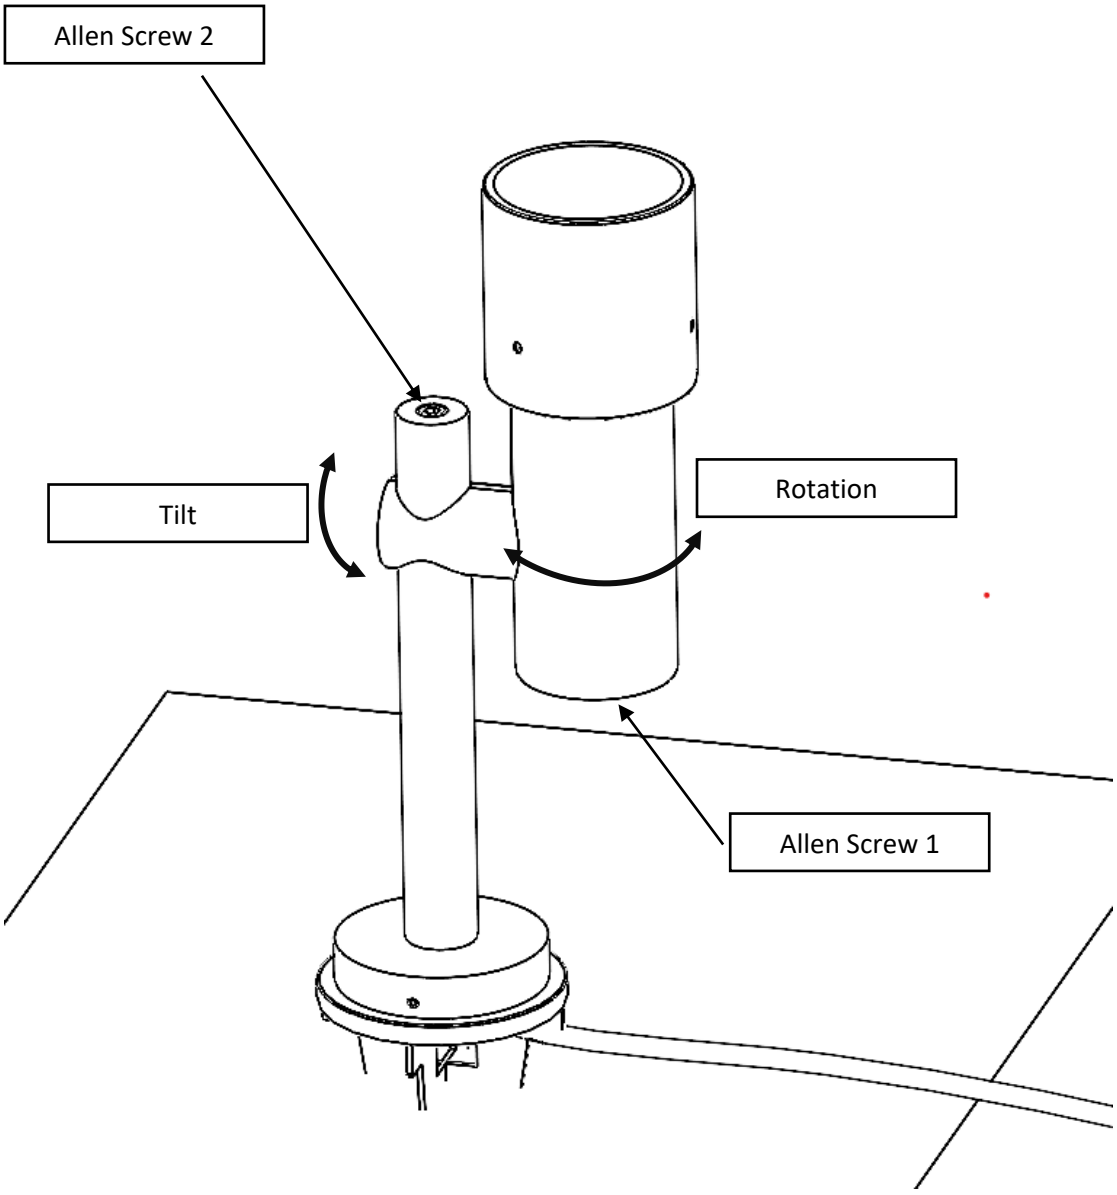


Fig.7

Installation is complete. Lights can be Turned On!