
Illios Curtain Grazer Installation Manual

Step 1: Make a marking on ceiling for fixation position of self-tapping screw as shown in below figure and take the dimension (L x W) from table. Fix the clip to the ceiling with help of self-tapping screw. Then drill the holes (Dia 6mm) on ceiling for release the cable from ceiling.

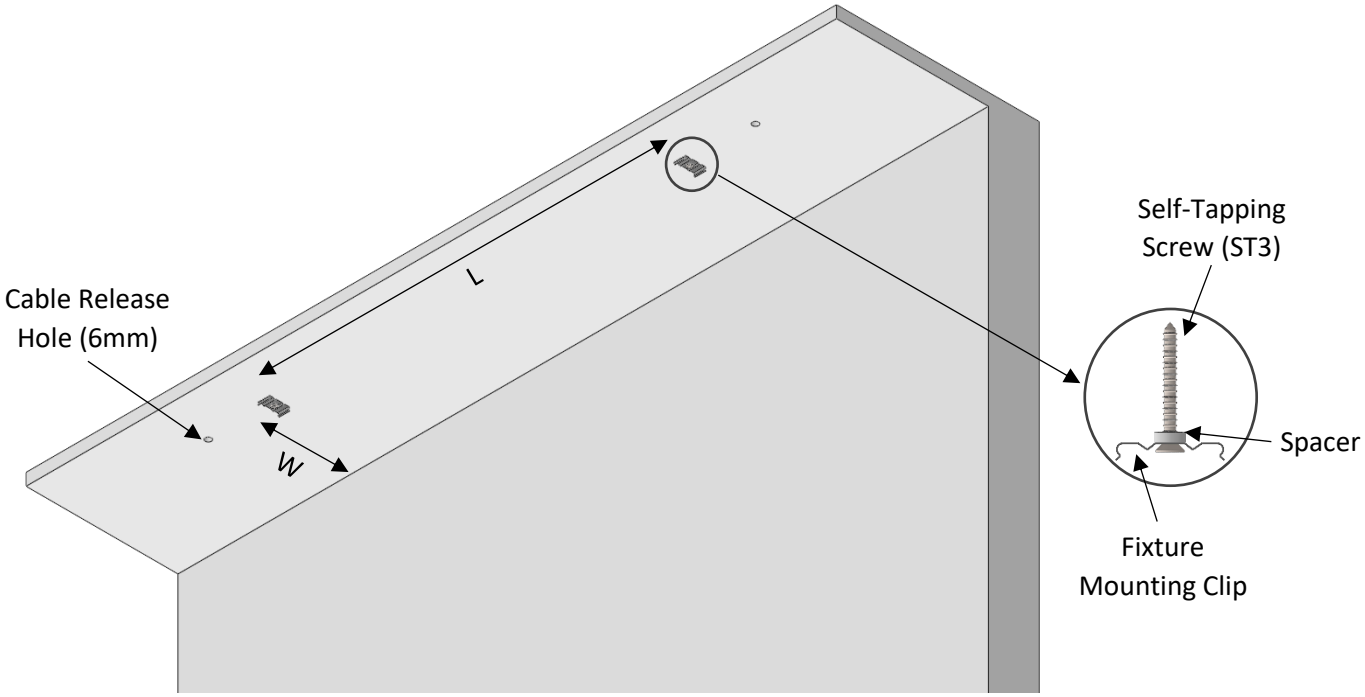

Sr. No	Standard Fixture Length x Width (mm)	Distance from Wall (W)	No. of Clips for Fixture	Distance between Two Clips (L)
1	128 mm x 28 mm	6-8 Inch	2 Nos	95 mm
2	253 mm x 28 mm	6-8 Inch	2 Nos	190 mm
3	503 mm x 28 mm	6-8 Inch	2 Nos	375 mm
4	1003 mm x 28 mm	6-8 Inch	2 Nos	750 mm
5	2003 mm x 28 mm	6-8 Inch	4 Nos	500 mm

Step 2: Tilting the fixture as shown in Fig3, then insert the fixture into the clip as arrow direction 1.

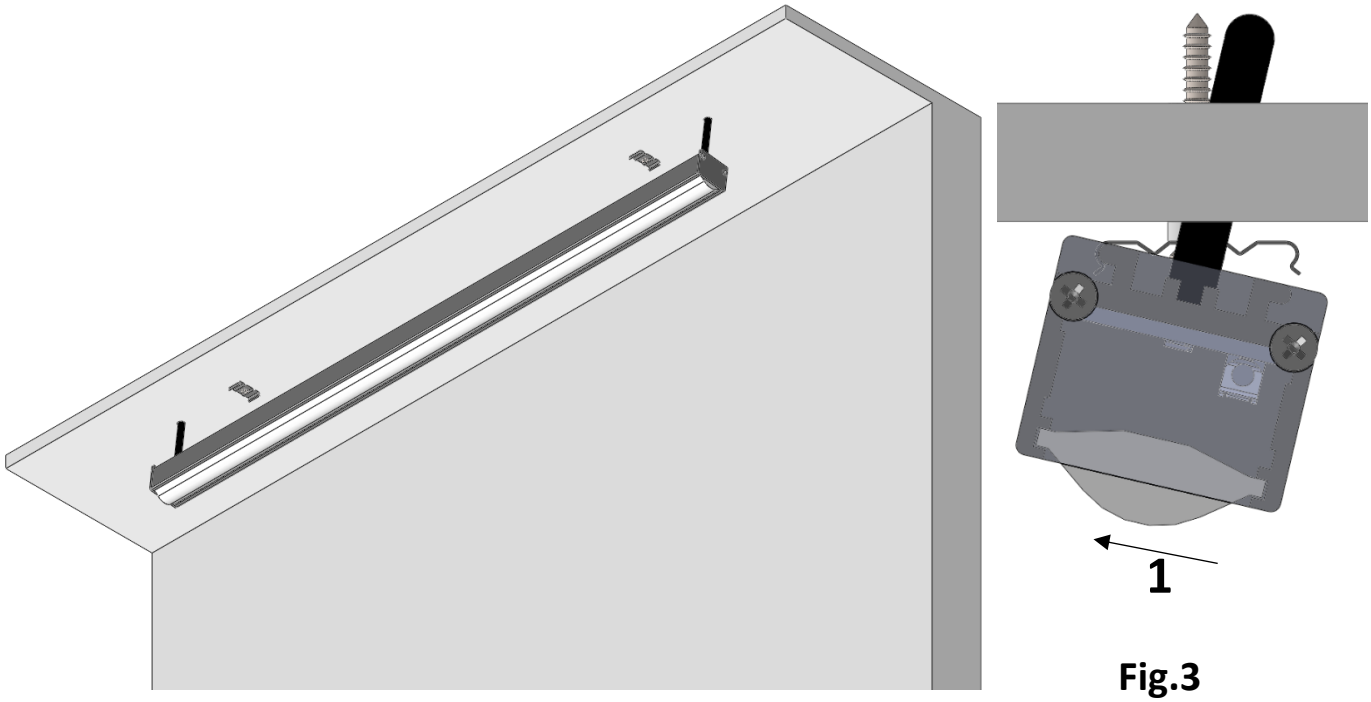


Fig.3

Step 3: Then rotate the fixture as shown in the Fig.4. Finally, the fixture mounted to the clip as shown Fig.5

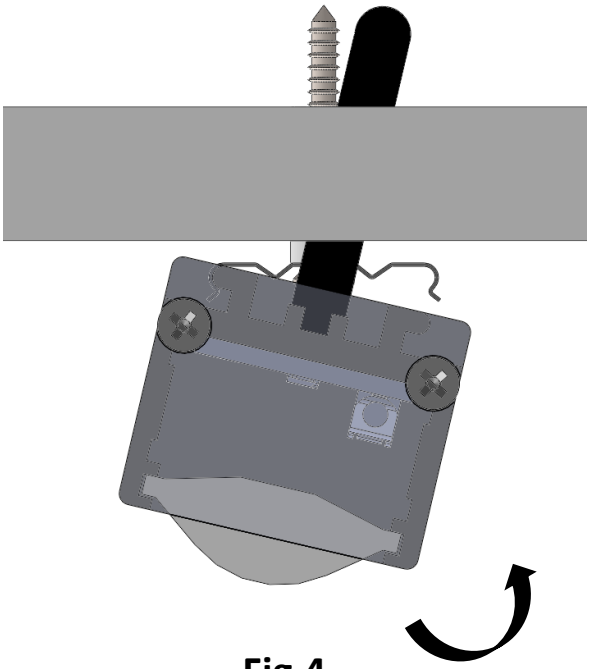


Fig.4


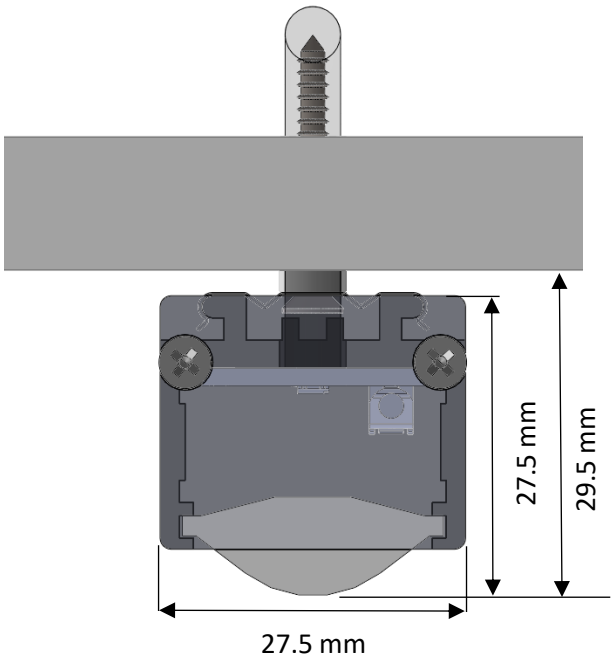



Fig.5

Step 4: Connect the fixture cable 1 to Driver. The cable 2 is providing for connect multi Illios Curtain Grazers.

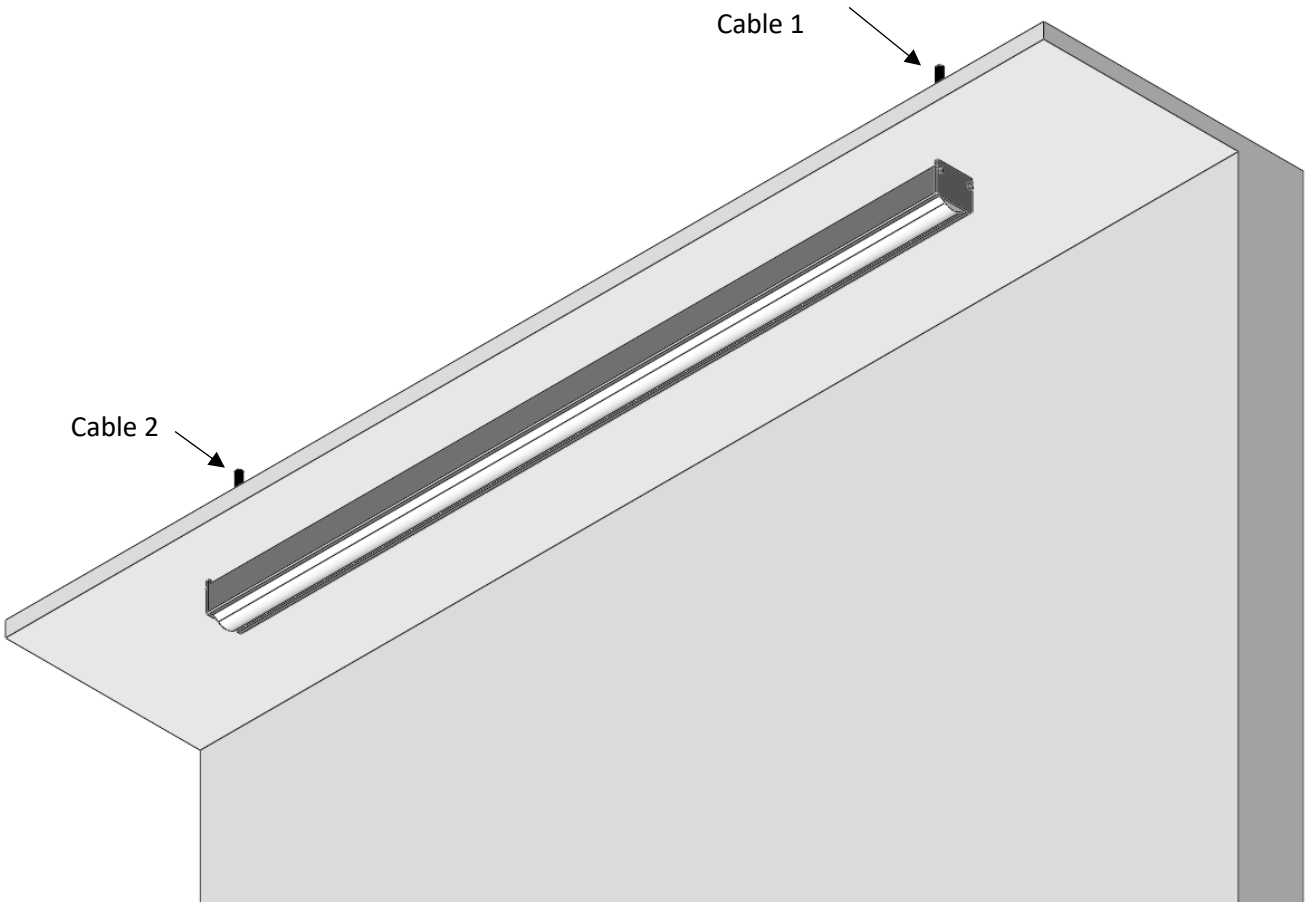

Installation is complete. Lights can be Turned On!

Additional Note: For purpose of maintenance remove the fixture by pulldown the fixture and disconnect the cables connection with other Illios Curtain Grazer.

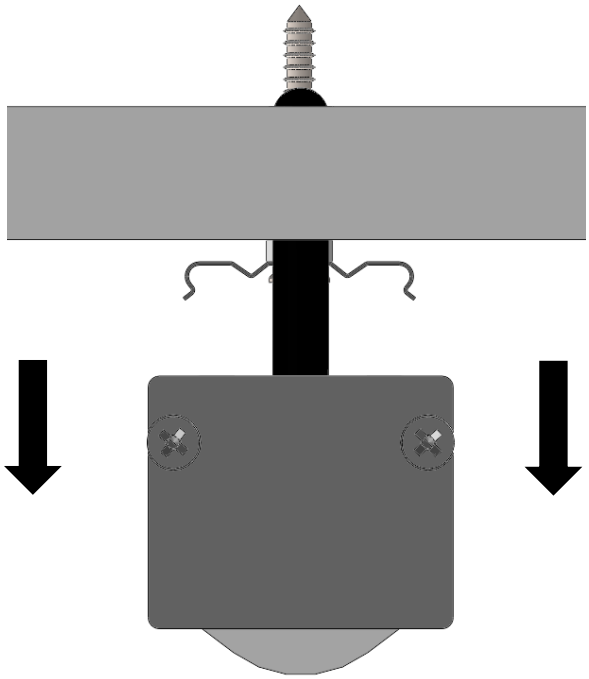

After maintenance work install back the fixture at its original position.